

The Road Inventory of Chickasaw National Wildlife Refuge Ripley, TN



Prepared By:
Federal Highway Administration
Central Federal Lands Highway Division
October, 2011



TABLE OF CONTENTS

<u>SECTION</u>		<u>PAGE</u>
I.	<u>INTRODUCTION</u>	1 - 1
II.	<u>SUMMARY INFORMATION</u> Summaries by Condition, Surface Type and Functional Class	2 - 1
III.	<u>REFUGE ROUTE LOCATION MAPS</u>	3 - 1
IV.	<u>ROUTE IDENTIFICATION LIST</u>	4 - 1
V.	<u>ROUTE CONDITION RATING SHEETS</u>	5 - 1
VI.	<u>PARKING LOT CONDITION RATING SHEETS</u>	6 - 1
VII.	<u>BRIDGE INVENTORY INFORMATION</u>	7 - 1
VIII.	<u>PHOTOGRAPHIC SHEETS</u>	8 - 1
IX.	<u>ACCIDENT SUMMARY</u>	9 - 1
	<u>APPENDIX</u>	
	Functional Classification Table	i
	Description of Rating System	ii

INTRODUCTION

The Transportation Equity Act for the 21st Century (Public Law 105-178) created the Refuge Roads Program. Refuge roads are those public roads that provide access to or within a unit of the National Wildlife Refuge System and for which title and maintenance responsibility is vested in the United States Government. Funds from the Highway Trust Fund are available for refuge roads and can be used by the station to pay the cost of:

- (a) Maintenance and improvements of refuge roads.
- (b) Maintenance and improvements of:
 - (1) Adjacent vehicle parking areas
 - (2) Provision for pedestrians and bicycles and
 - (3) Construction and reconstruction of roadside rest areas that are located in or adjacent to wildlife refuges
- (c) Administrative costs associated with such maintenance and improvements.

The funds available for refuge roads are to be disbursed based on the relative needs of the various refuges in the National Wildlife Refuge System, and taking into consideration:

- (a) The comprehensive conservation plan for each refuge;
- (b) The need for access as identified through land use planning; and
- (c) The impact of land use planning on existing transportation facilities.

To determine the relative needs of the U.S. Fish and Wildlife Service, the Federal Highway Administration (FHWA) was asked to inventory all public access roads and parking lots and provide a condition assessment of each. In 2008 the inventory was expanded to include administrative (service use only) roads and parking lots. An FHWA representative meets with refuge personnel to identify route segments and assign route numbers and functional classifications (See Appendix) for each route. All roads and parking lots are mapped using Trimble GPS units and visually assessed for condition using the RSL method of evaluation developed at Utah State University (See Appendix). Culverts, Gates, Guardrails and Low Water Crossings are also mapped and inspected for any obvious defects.

An estimate is provided, in year 2008 dollars, based on the condition determined by the rating system. Estimates are based upon data and location factors from the 2008 RS Means Heavy Construction Cost Data 22nd Annual Edition. Cost estimates should be evaluated on a case-by-case basis when being used for programming purposes.

Native Surfaced roads and parking lots already inventoried will not be re-inventoried and will not appear individually in report chapters 5, 6 and 8. Mileages and areas of native surfaced roads and parking lots will still appear in all summaries in the report and will remain in the road inventory database. In addition to this report, the FHWA will furnish the condition ratings of each route and segment to the Fish and Wildlife Service in a Microsoft Access database so the data can be included in their Real Property Inventory.

Chickasaw

Summaries

Route Miles and Percentages by Functional Class and Condition

Condition Rating (Based on RSL)*

F. C.	Excellent		Good		Fair		Poor		Failed		TOTAL MILES
	MILES	%	MILES	%	MILES	%	MILES	%	MILES	%	
I	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
II	0.00	0.0%	0.52	100.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.52
III	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
IV	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
V	0.00	0.0%	6.60	44.8%	7.90	53.6%	0.23	1.6%	0.00	0.0%	14.73
Totals	0.00	0.0%	7.12	46.7%	7.90	51.8%	0.23	1.5%	0.00	0.0%	15.25

*For a description of condition ratings for the various surface types see the Appendix.

Route Miles and Percentages by Surface Type and Condition

Paved Condition Rating [Condition(RSL)]

Surface	Excellent		Good		Fair		Poor		Failed		TOTAL MILES
	MILES	%	MILES	%	MILES	%	MILES	%	MILES	%	
AS	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
CO	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
Totals	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.

Unpaved Condition Rating [Condition(RSL)]

Surface	Excellent		Good		Fair		Poor		Failed		TOTAL MILES
	MILES	%	MILES	%	MILES	%	MILES	%	MILES	%	
GR	0.00	0.0%	4.80	46.9%	5.43	53.1%	0.00	0.0%	0.00	0.0%	10.23
NA	0.00	0.0%	1.87	62.5%	0.89	29.8%	0.23	7.7%	0.00	0.0%	2.99
PR	0.00	0.0%	0.45	22.2%	1.58	77.8%	0.00	0.0%	0.00	0.0%	2.03
Totals	0.00	0.0%	7.12	46.7%	7.90	51.8%	0.23	1.5%	0.00	0.0%	15.25

Square Footage (Parking Areas)

Condition Rating

Surface	Excellent		Good		Fair		Poor		Failed		Total Square Feet
	Square Feet	%	Square Feet	%	Square Feet	%	Square Feet	%	Square Feet	%	
AS	0	0.0%	0	0.0%	22262	100.0%	0	0.0%	0	0.0%	22262
CO	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0
GR	0	0.0%	58333	42.7%	57279	41.9%	0	0.0%	21008	15.4%	136620
NA	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0
PR	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0
Totals	0	0.0%	58333	36.7%	79541	50.1%	0	0.0%	21008	13.2%	158,882

Chickasaw Summaries

Route Miles and Percentages by Use Type and Condition

Road Condition Rating: Public/Administrative Use


USE TYPE	Excellent		Good		Fair		Poor		Failed		TOTAL MILES
	MILES	%	MILES	%	MILES	%	MILES	%	MILES	%	
Public (FC I-III)	0.00	0.0%	0.52	100.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.52
Admin (FC IV-V)	0.00	0.0%	6.60	44.8%	7.90	53.6%	0.23	1.6%	0.00	0.0%	14.73
Totals	0.00	0.0%	7.12	46.7%	7.90	51.8%	0.23	1.5%	0.00	0.0%	15.25

Parking Condition Rating: Public/Administrative Use

USE TYPE	Excellent		Good		Fair		Poor		Failed		Total Sq Ft
	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	
Public	0	0.0%	58333	43.0%	56223	41.5%	0	0.0%	21008	15.5%	135564
Admin	0	0.0%	0	0.0%	23318	100.0%	0	0.0%	0	0.0%	23318
Totals	0	0.0%	58333	36.7%	79541	50.1%	0	0.0%	21008	13.2%	158,882

Chickasaw National Wildlife Refuge

ROUTE LOCATION MAP

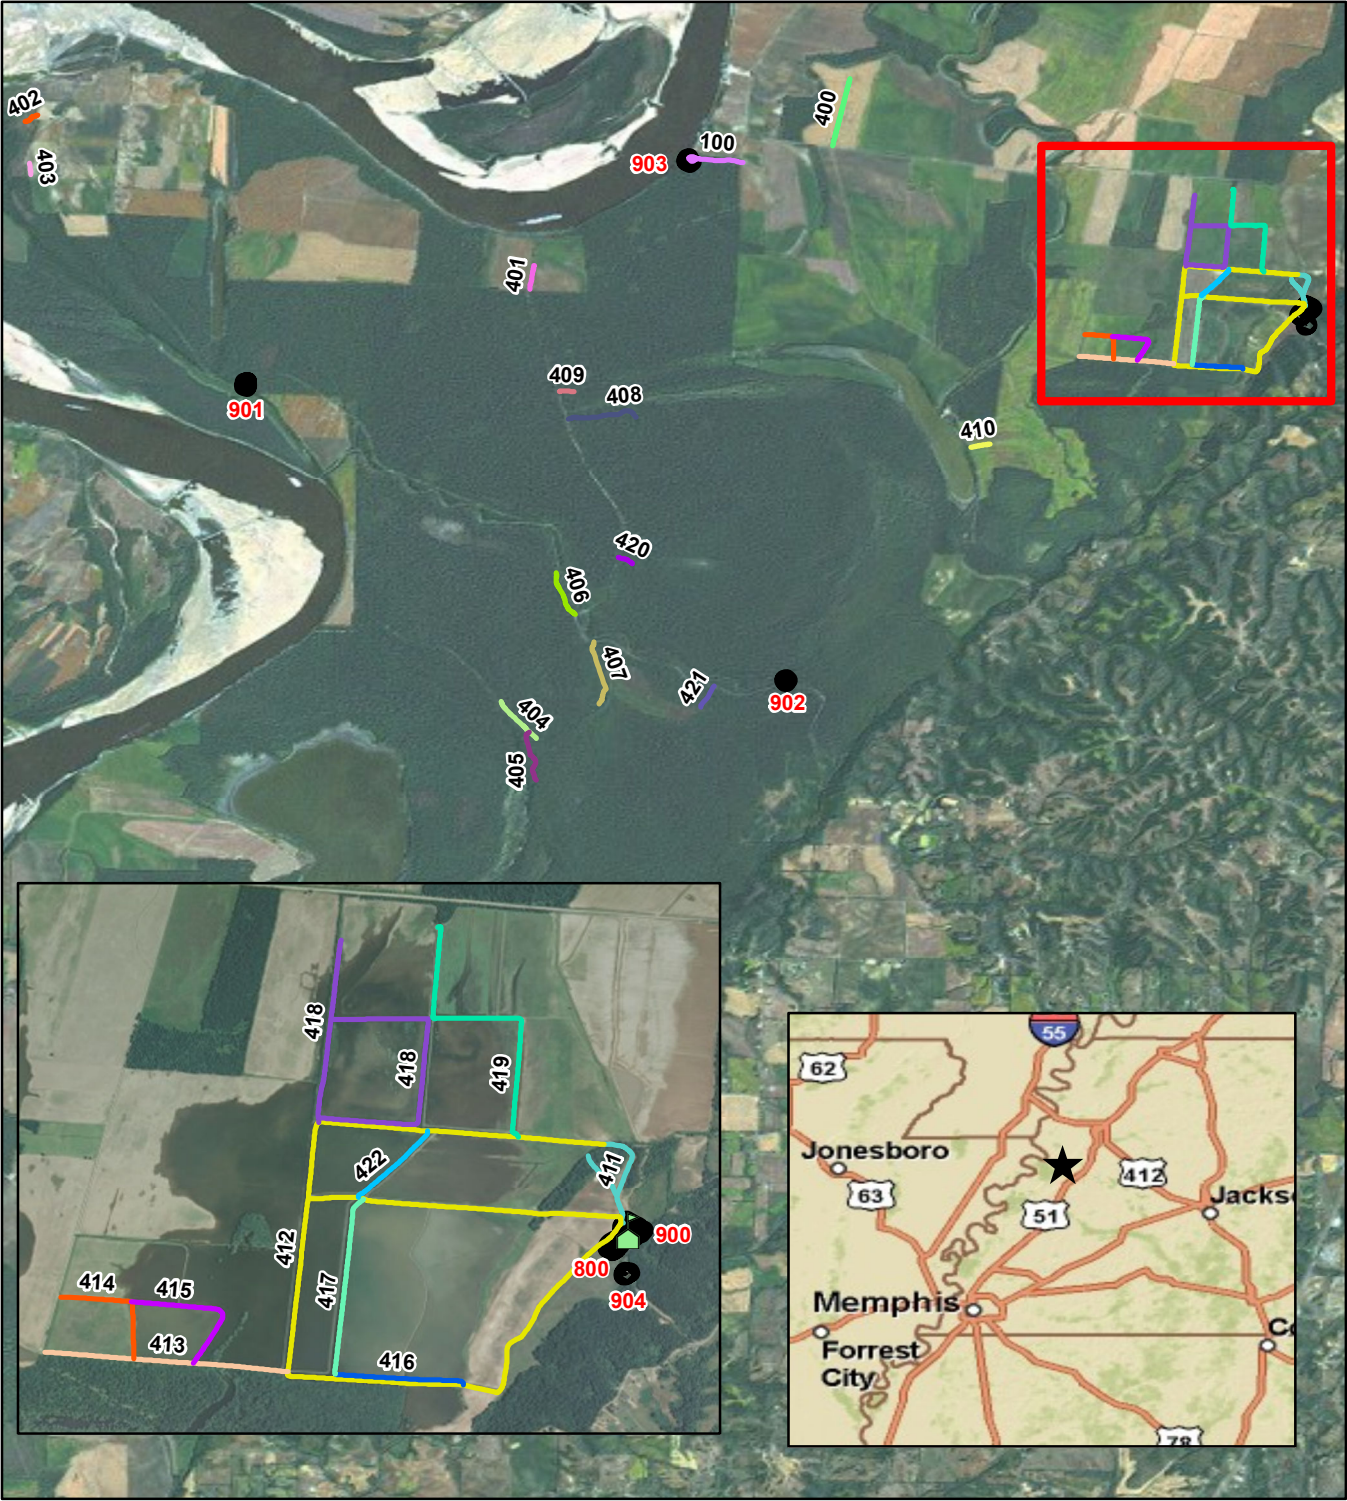

Chickasaw - 42526 - ROUTE IDENTIFICATION LIST (NUMERIC)

Shading Color Key:

White = Paved Routes
Yellow = Unpaved Routes

RTE #	Asset Number	ROUTE NAME	RTE MI	ROUTE DESCRIPTION	PAVED MI	UN-PAVED MI	LANES	FC
100	10016273	Ed Jones Boat Ramp Road	0.52	From Hales Point Bar Road to Ed Jones Boat Ramp Parking (Route 903)	0.00	0.52	2	2
400	10045847	Hendren Road	0.65	From Dee Web Road to Tree Line	0.00	0.65	1	5
401		Sycamore Road	0.23	From Hales Point Barr Road to Private Land	0.00	0.23	1	5
402		Bar Plum Road	0.12	From behind New Mitchell Grove Church to River	0.00	0.12	1	5
403		Bar Field Road	0.11	From behind private residence off of Barr Road to River	0.00	0.11	1	5
404	10041596	Rush Slough Road	0.45	From Morris Road to South Refuge Boundary	0.00	0.45	1	5
405		Right Hand Arm Road	0.49	From Rush Slough Road (Route 404) to Right Hand Arm Lake	0.00	0.49	1	5
406		Cherry Bark Lane	0.44	From Barr Road to Slough	0.00	0.44	1	5
407	10016269	Camp Slough Road	0.62	From Barr Road to Camp Slough	0.00	0.62	1	5
408	10016266	Loop Road	0.57	From Watkins Road to Slough and back to Watkins Road	0.00	0.57	1	5
409	10016264	Dry Arm Road	0.11	From Watkins Road to Dry Arm Slough	0.00	0.11	1	5
410	10045843	Warpool Road	0.15	From Chisholm Lake Road to Jennings Pond	0.00	0.15	1	5
411	10041392	Boneyard Road	0.54	From Headquarters Parking (Route 900) to Boneyard Shop Area	0.00	0.54	1	5
412		Sanctuary Service Road	4.16	From Boneyard Road (Route 411) to Headquarters Parking (Route 900)	0.00	4.15	2	5
413		Levee 9 -11 South Road	0.73	From Sanctuary Service Road (Route 412) to Private Land	0.00	0.73	1	5
414		Levee North and East of 9W Road	0.43	From Levee 9-11 South Road (Route 413) to Private Land	0.00	0.43	1	5
415		Levee North and East of 9E Road	0.49	From Levee 9-11 South Road (Route 413) to Levee North and East of 9W Road (Route 414)	0.00	0.49	1	5
416		Levee South of 7 and 8 Road	0.40	From Sanctuary Service Road (Route 412) to Levee 7 West Road (Route 417)	0.00	0.40	1	5
417		Levee 7 West Road	0.66	From Sanctuary Service Road (Route 412) to Levee South of 7 and 8 Road (Route 416)	0.00	0.66	1	5

Chickasaw - 42526 - ROUTE IDENTIFICATION LIST (NUMERIC)

Shading Color Key:

White = Paved Routes
Yellow = Unpaved Routes

RTE #	Asset Number	ROUTE NAME	RTE MI	ROUTE DESCRIPTION	PAVED MI	UN-PAVED MI	LANES	FC
418		Unit 1 Levee Road	1.66	From Sanctuary Service Road (Route 412) to North Boundary	0.00	1.66	1	5
419		Levee 2 North and South Road	1.05	From Sanctuary Service Road (Route 412) to North Boundary	0.00	1.05	1	5
420		Gar Pond Road	0.13	From Watkins Road to Gar Pond	0.00	0.13	1	5
421		South of Campground Road	0.22	From Bar Road to Camp Slough Road (Route 407)	0.00	0.22	1	5
422		Levee 4 South and East Road	0.33	From Sanctuary Service Road (Route 412) to Sanctuary Service Road (Route 412)	0.00	0.33	1	5

Chickasaw - 42526 - ROUTE IDENTIFICATION LIST (PARKING)

Shading Color Key:

White = Paved Parking Lots

Green = Unpaved Parking Lots

RTE #	Asset Number	ROUTE NAME	RTE SQFT	ROUTE DESCRIPTION	PAVED SQFT	UNPAVED SQFT
800		Shop Parking	23,318		0	23,318
900	10016258	Headquarters Parking	51,313		0	51,313
901	10016260	Wardlows Chute Boat Ramp Parking	22,262		22,262	0
902	10016262	Barr Road Campground Parking	21,008		0	21,008
903	10016272	Ed Jones Boat Ramp Parking	33,961		0	33,961
904		Observation Parking	7,020		0	7,020

CHANGES TO THE FISH AND WILDLIFE SERVICE ROAD INVENTORY REPORT

Chickasaw

Routes added to previous inventory:

Rte #	Rte Name	Reason for Addition
400	Hendren Road	Administrative
401	Sycamore Road	Administrative
402	Bar Plum Road	Administrative
403	Bar Field Road	Administrative
404	Rush Field Road	Administrative
405	Right Hand Arm Road	Administrative
406	Cherry Bark Lane	Administrative
407	Camp Slough Road	Administrative
408	Loop Road	Administrative
409	Dry Arm Road	Administrative
410	Warpool Road	Administrative
411	Bonyard Road	Administrative
412	Sanctuary Service Road	Administrative
413	Levee 9 - 11 South Road	Administrative
414	Levee North and East of 9W Road	Administrative
415	Levee North and East of 9E Road	Administrative
416	Levee South of 7 and 8 Road	Administrative
417	Levee 7 West Road	Administrative
418	Unit 1 Levee Road	Administrative
419	Levee 2 North and South Road	Administrative
420	Gar Pond Road	Administrative
421	South of Campground Road	Administrative
422	Levee 4 South and East Road	Administrative
800	Shop Parking	Administrative


Routes removed from previous inventory:

Rte #	Rte Name	Reason for Removal

Routes modified from previous inventory:

Rte #	Rte Name	Type of Modification	Description of Modification
900	Headquarters Parking	Geometry Change	
901	Wardlows Chute Boat Ramp Parking	Surface Change	
903	Ed Jones Boat Ramp Parking	Geometry Change	

Comments:

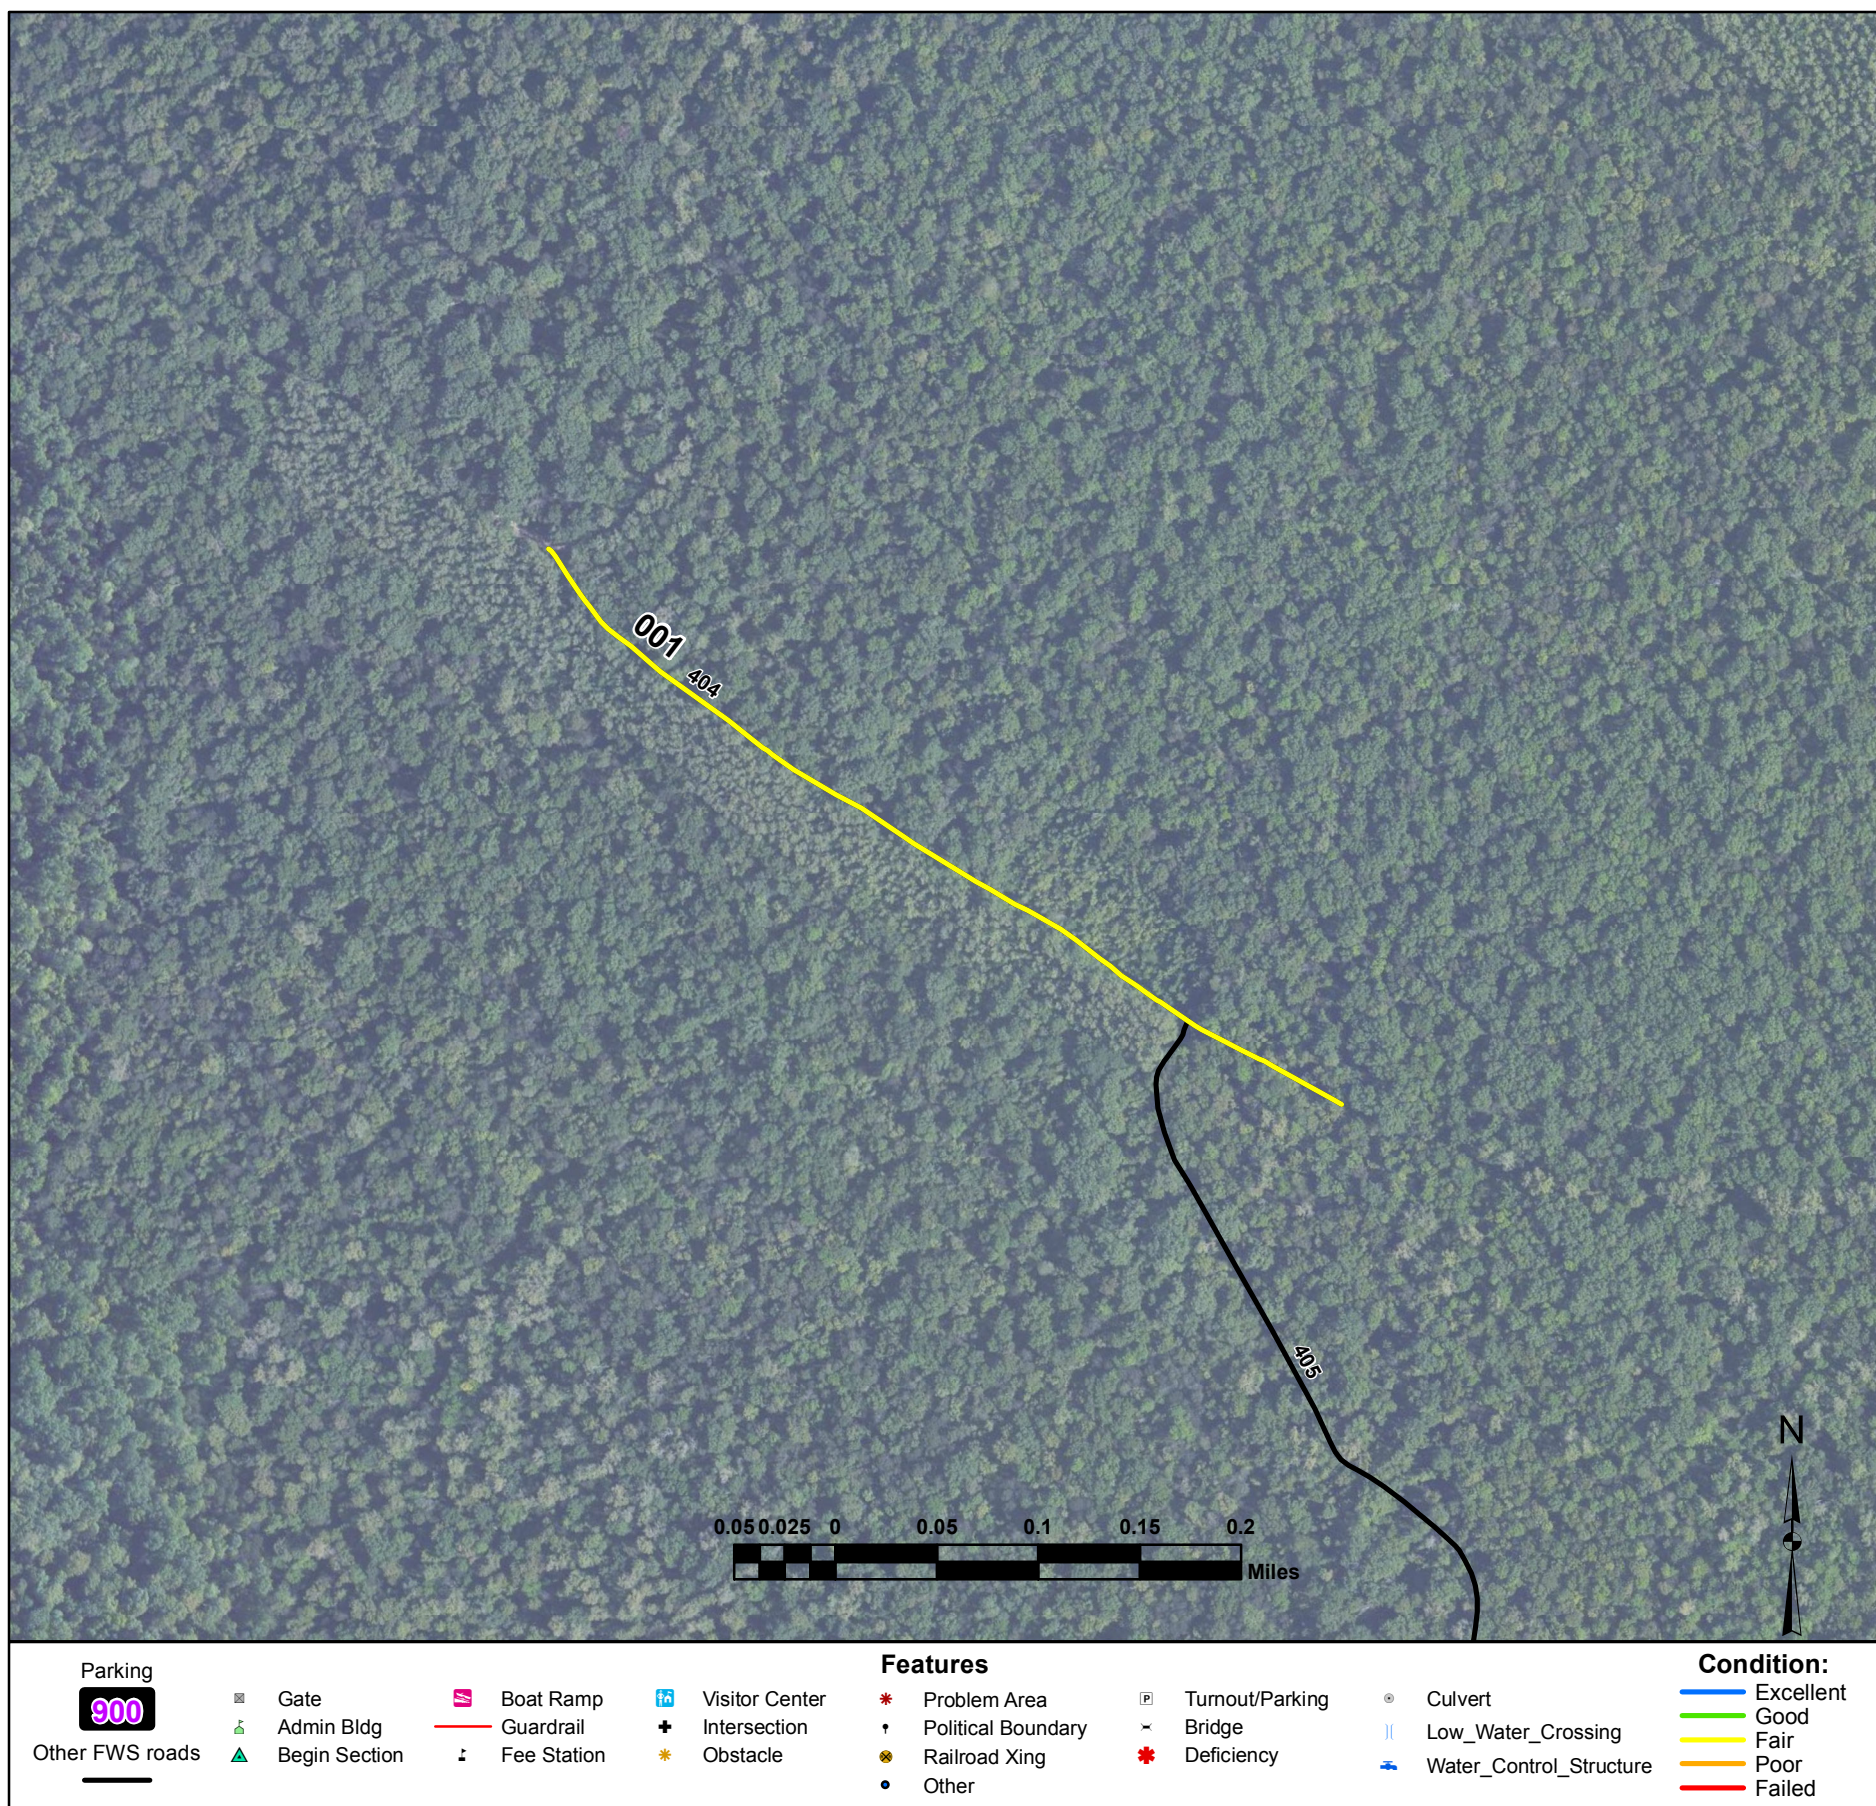

Rush Slough Road

From Morris Road to South Refuge Boundary

Route Number: 404

Total Route Mileage: 0.45

Asset Number	10041596				
Section Number	001				
Section Length (miles)	0.45				
Inspection Date	07-11-2011				
Surface Type	Native				
Number of Lanes	1				
Roadway Width (feet)	12				
Condition	Fair				
Remaining Service Life (years)	4				
Estimated Cost to Repair	\$900				
Current Replacement Value	\$155,400				

Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
No Features							





From Barr Road to Slough

Route Number: 406

Total Route Mileage: 0.44


Asset Number	-				
Section Number	001				
Section Length (miles)	0.44				
Inspection Date	07-11-2011				
Surface Type	Native				
Number of Lanes	1				
Roadway Width (feet)	10				
Condition	Fair				
Remaining Service Life (years)	3				
Estimated Cost to Repair	\$900				
Current Replacement Value	\$152,800				

Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
No Features							



Asset Number	10016264				
Section Number	001				
Section Length (miles)	0.11				
Inspection Date	07-11-2011				
Surface Type	Primitive				
Number of Lanes	1				
Roadway Width (feet)	12				
Condition	Fair				
Remaining Service Life (years)	4				
Estimated Cost to Repair	\$100				
Current Replacement Value	\$0				

Features No Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
--------------------------------	------------------	-----------------	------------------	-----------------	------------------	-----------------	------------------

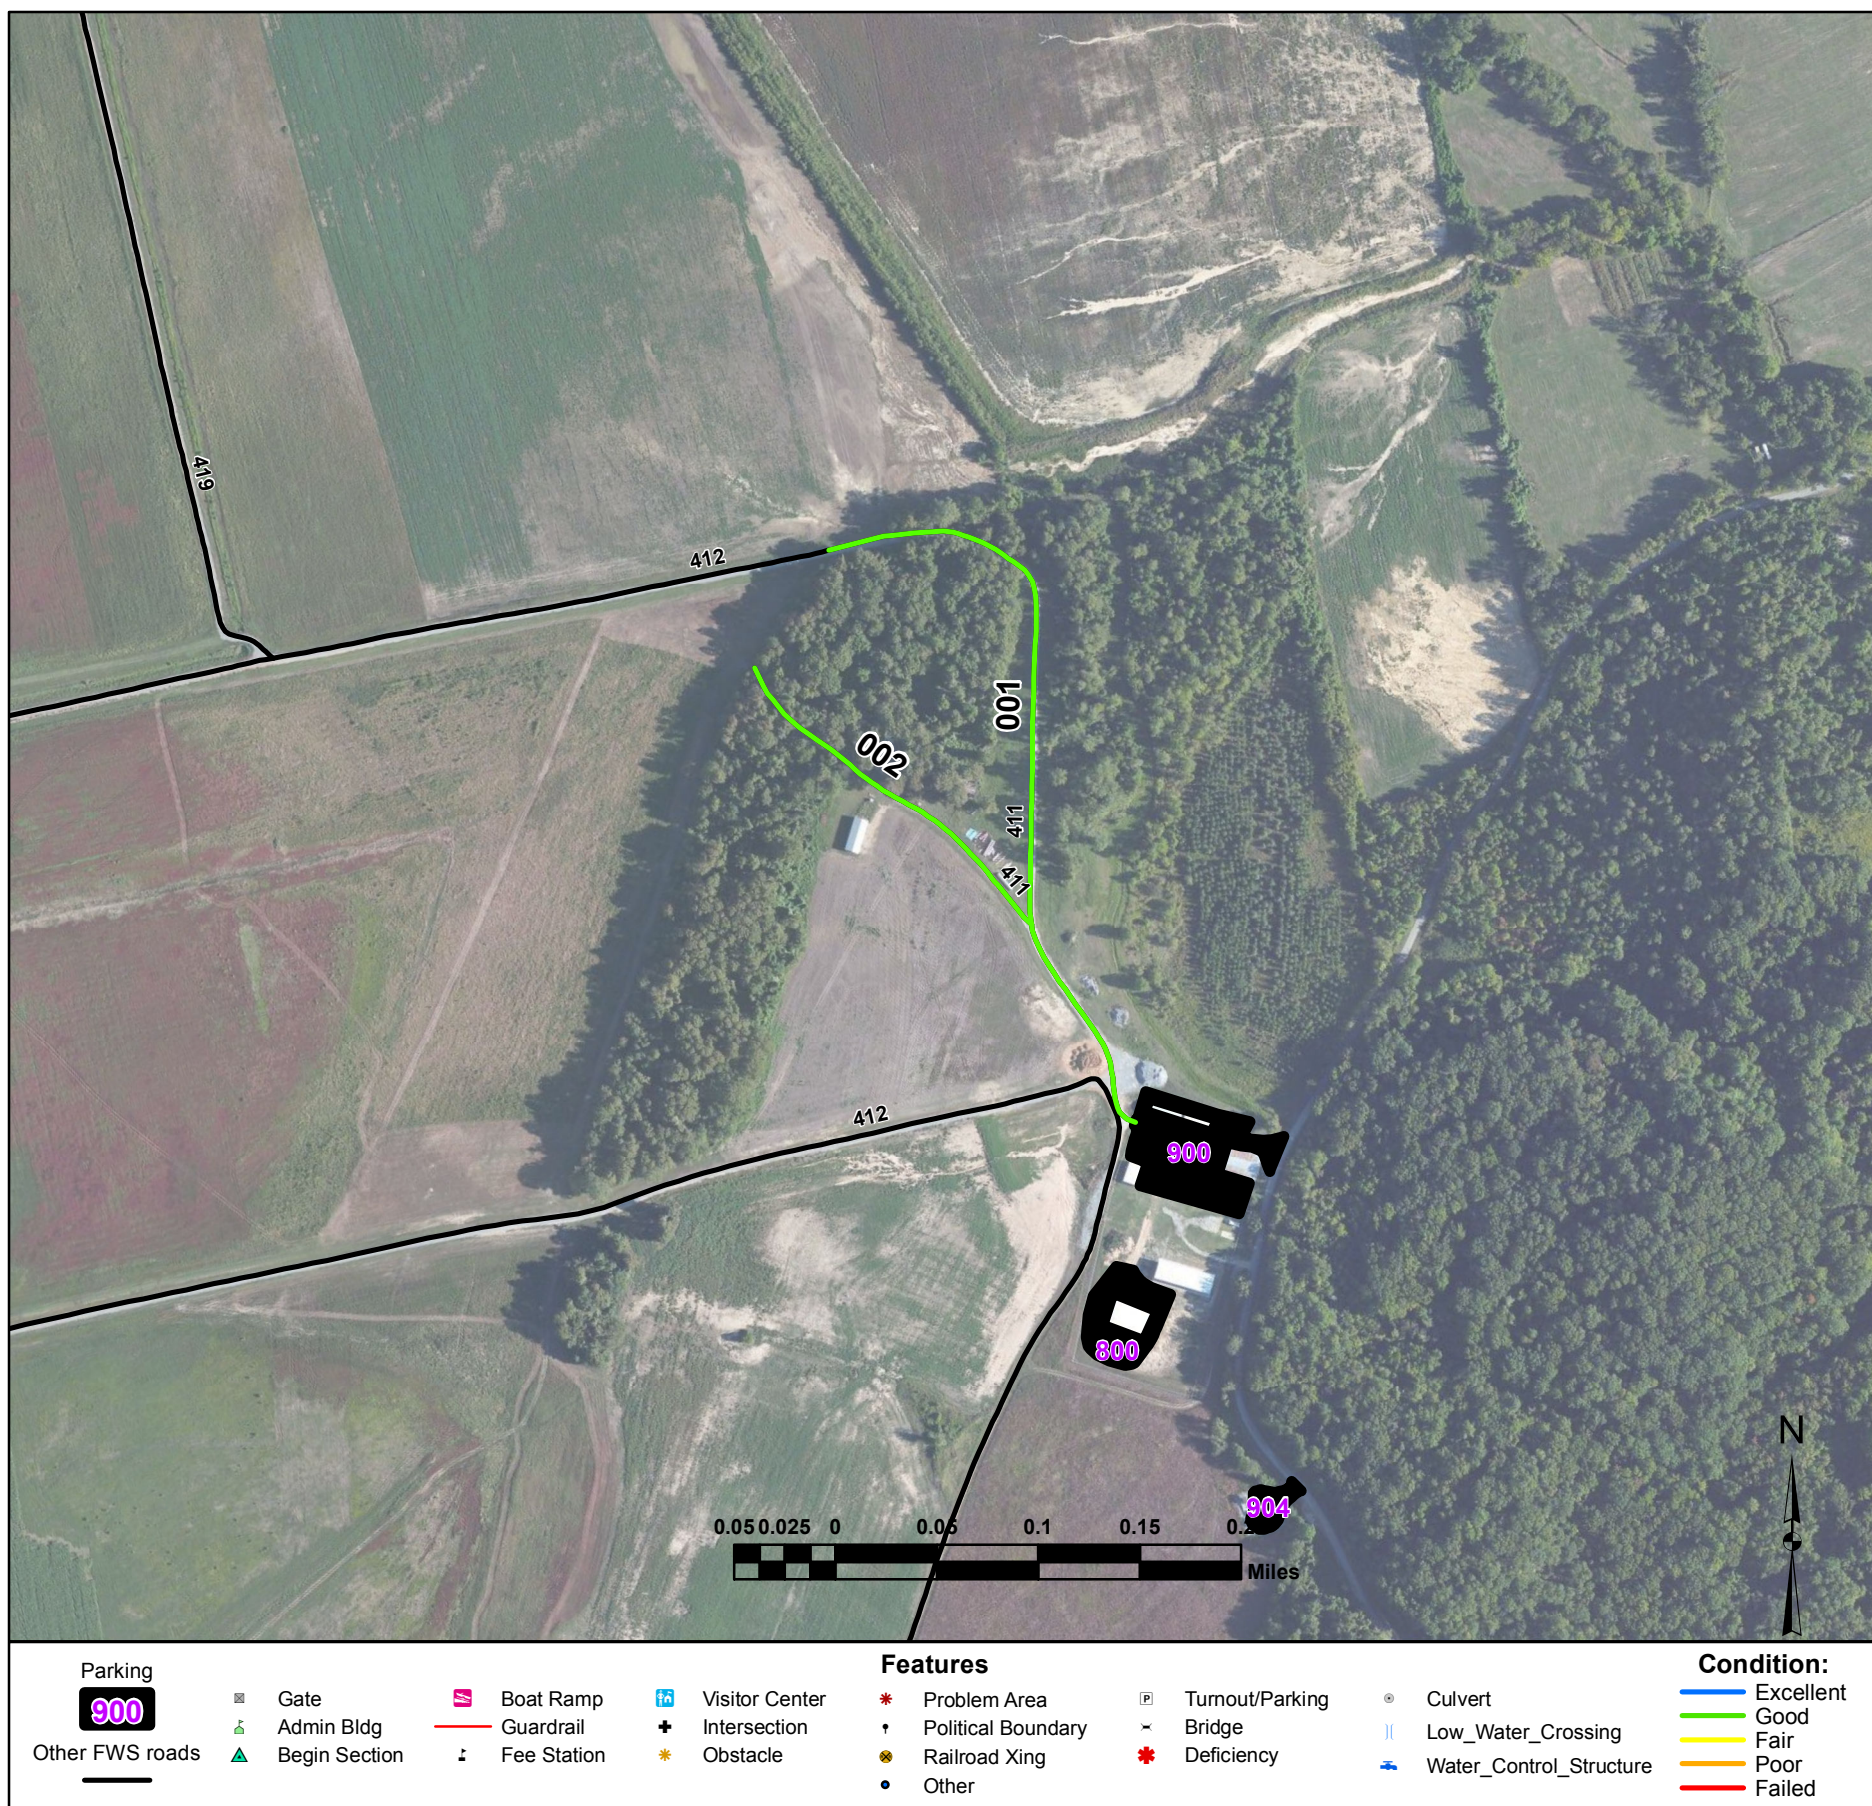

Boneyard Road


From Headquarters Parking (Route 900) to Boneyard Shop Area


Route Number: 411


Total Route Mileage: 0.54

Asset Number	10041392	10041392			
Section Number	001	002			
Section Length (miles)	0.36	0.18			
Inspection Date	07-11-2011	07-11-2011			
Surface Type	Gravel	Gravel			
Number of Lanes	1	1			
Roadway Width (feet)	14	10			
Condition	Good	Good			
Remaining Service Life (years)	7	7			
Estimated Cost to Repair	\$600	\$300			
Current Replacement Value	\$244,700	\$117,600			

Features No Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
--------------------------------	------------------	-----------------	------------------	-----------------	------------------	-----------------	------------------

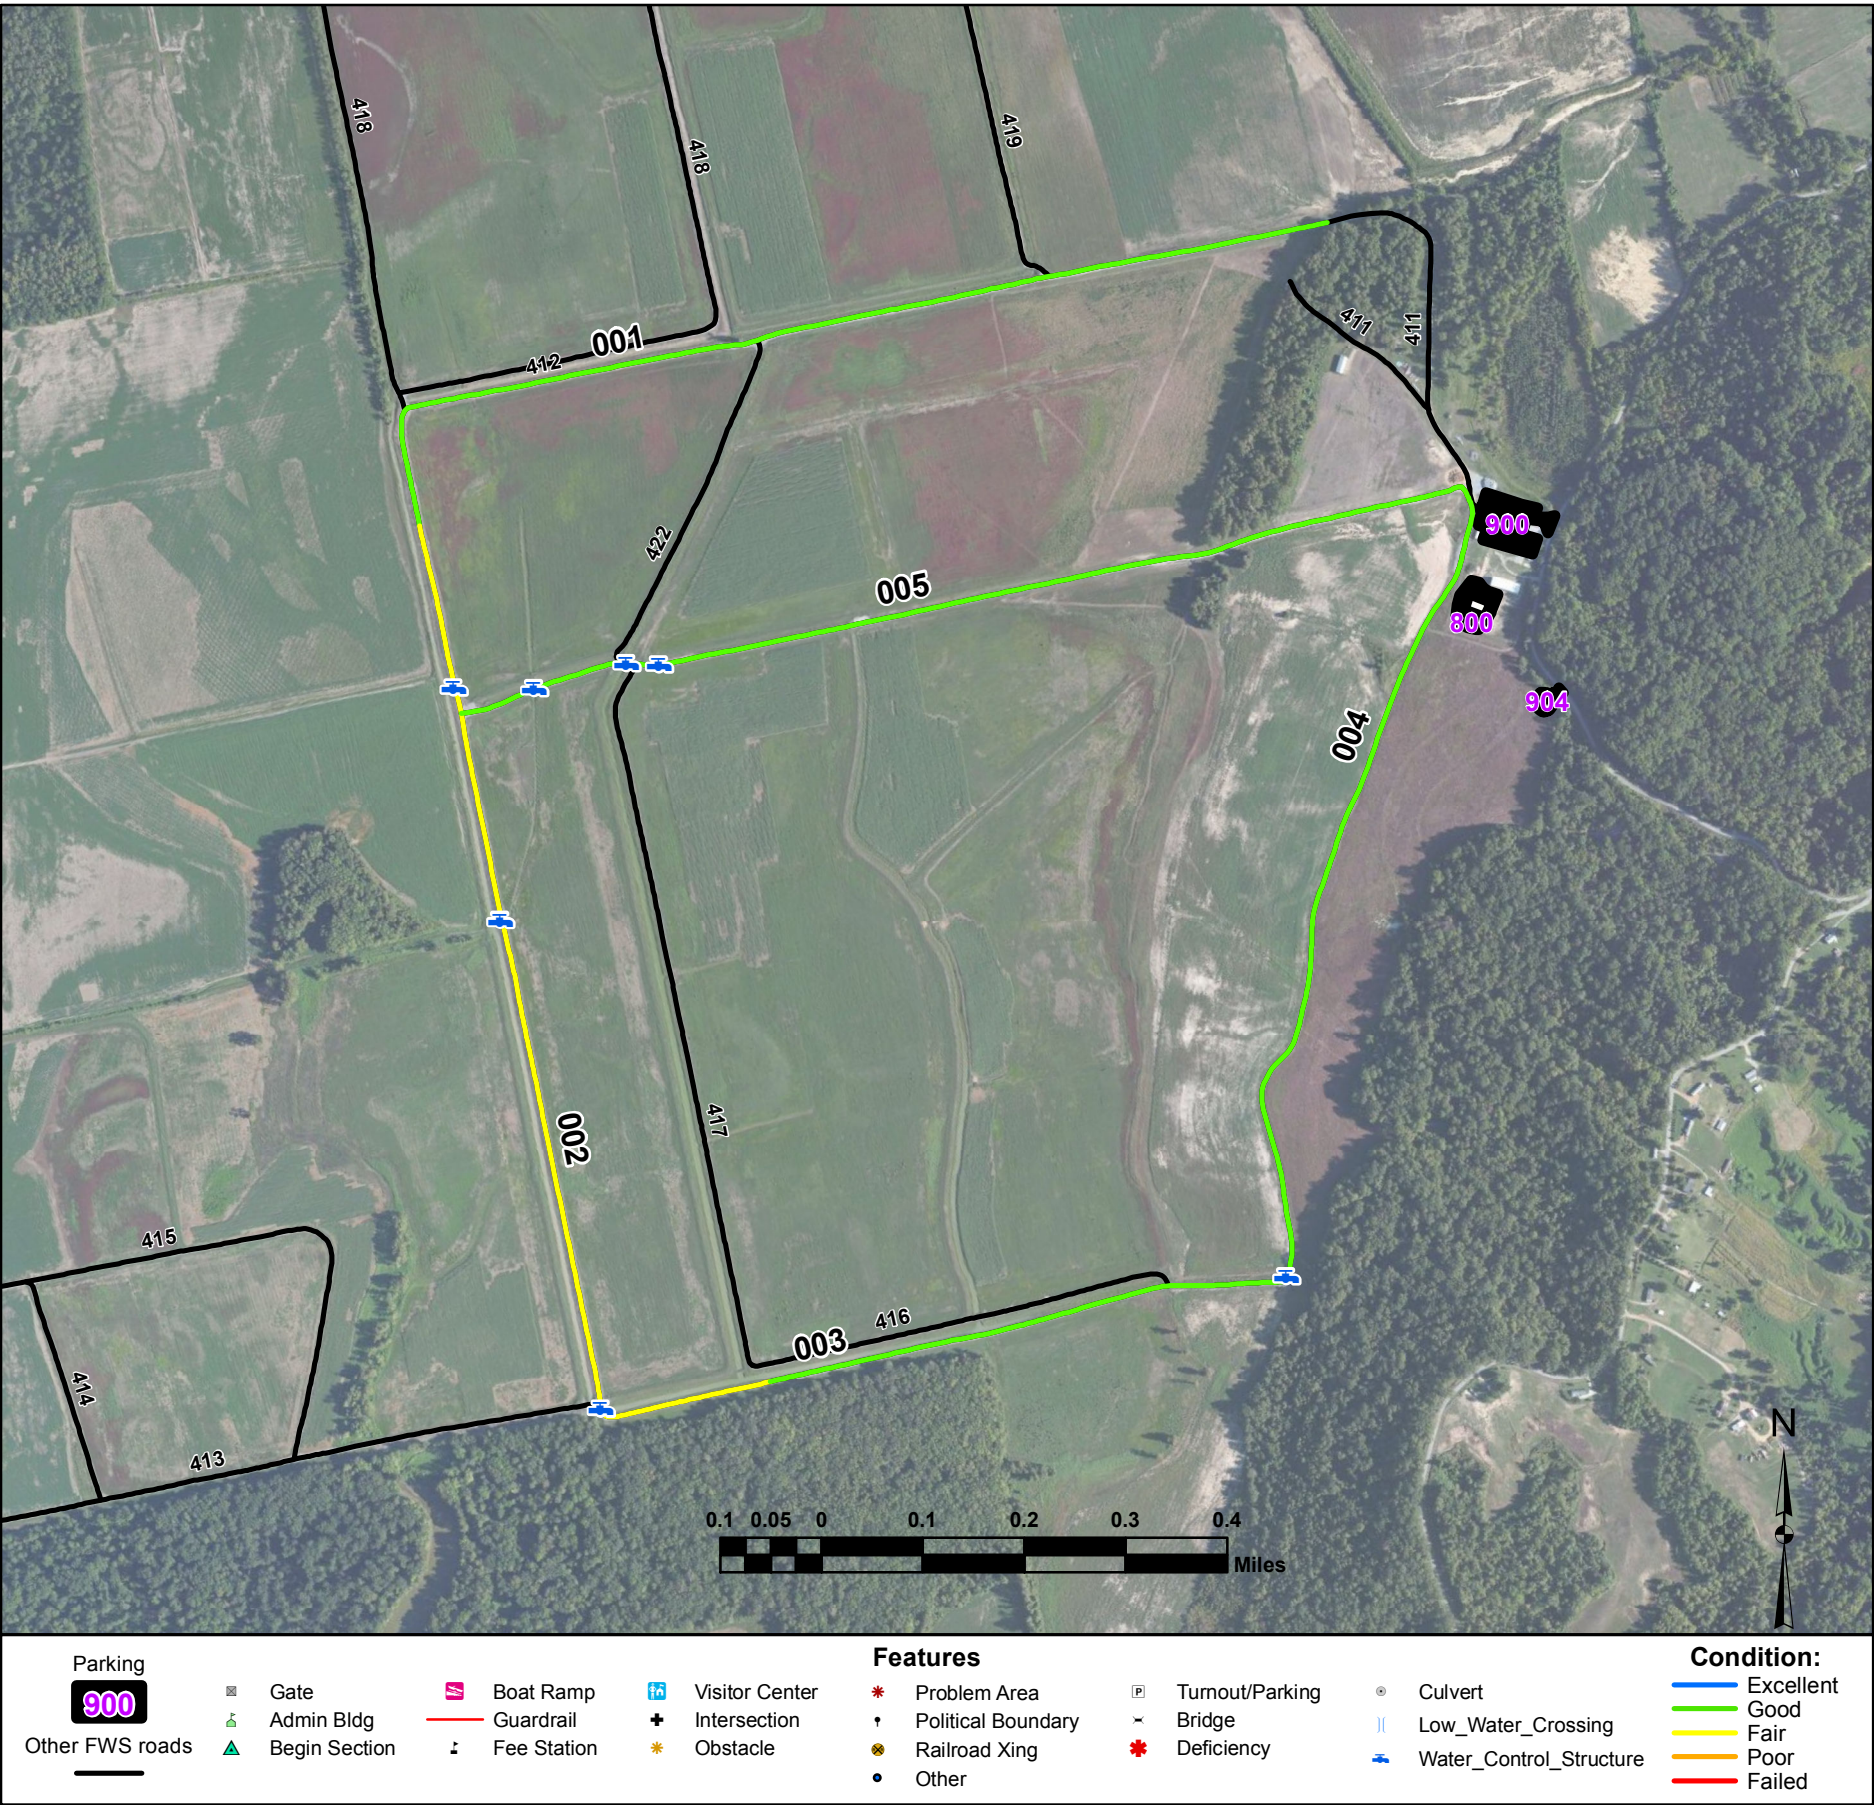

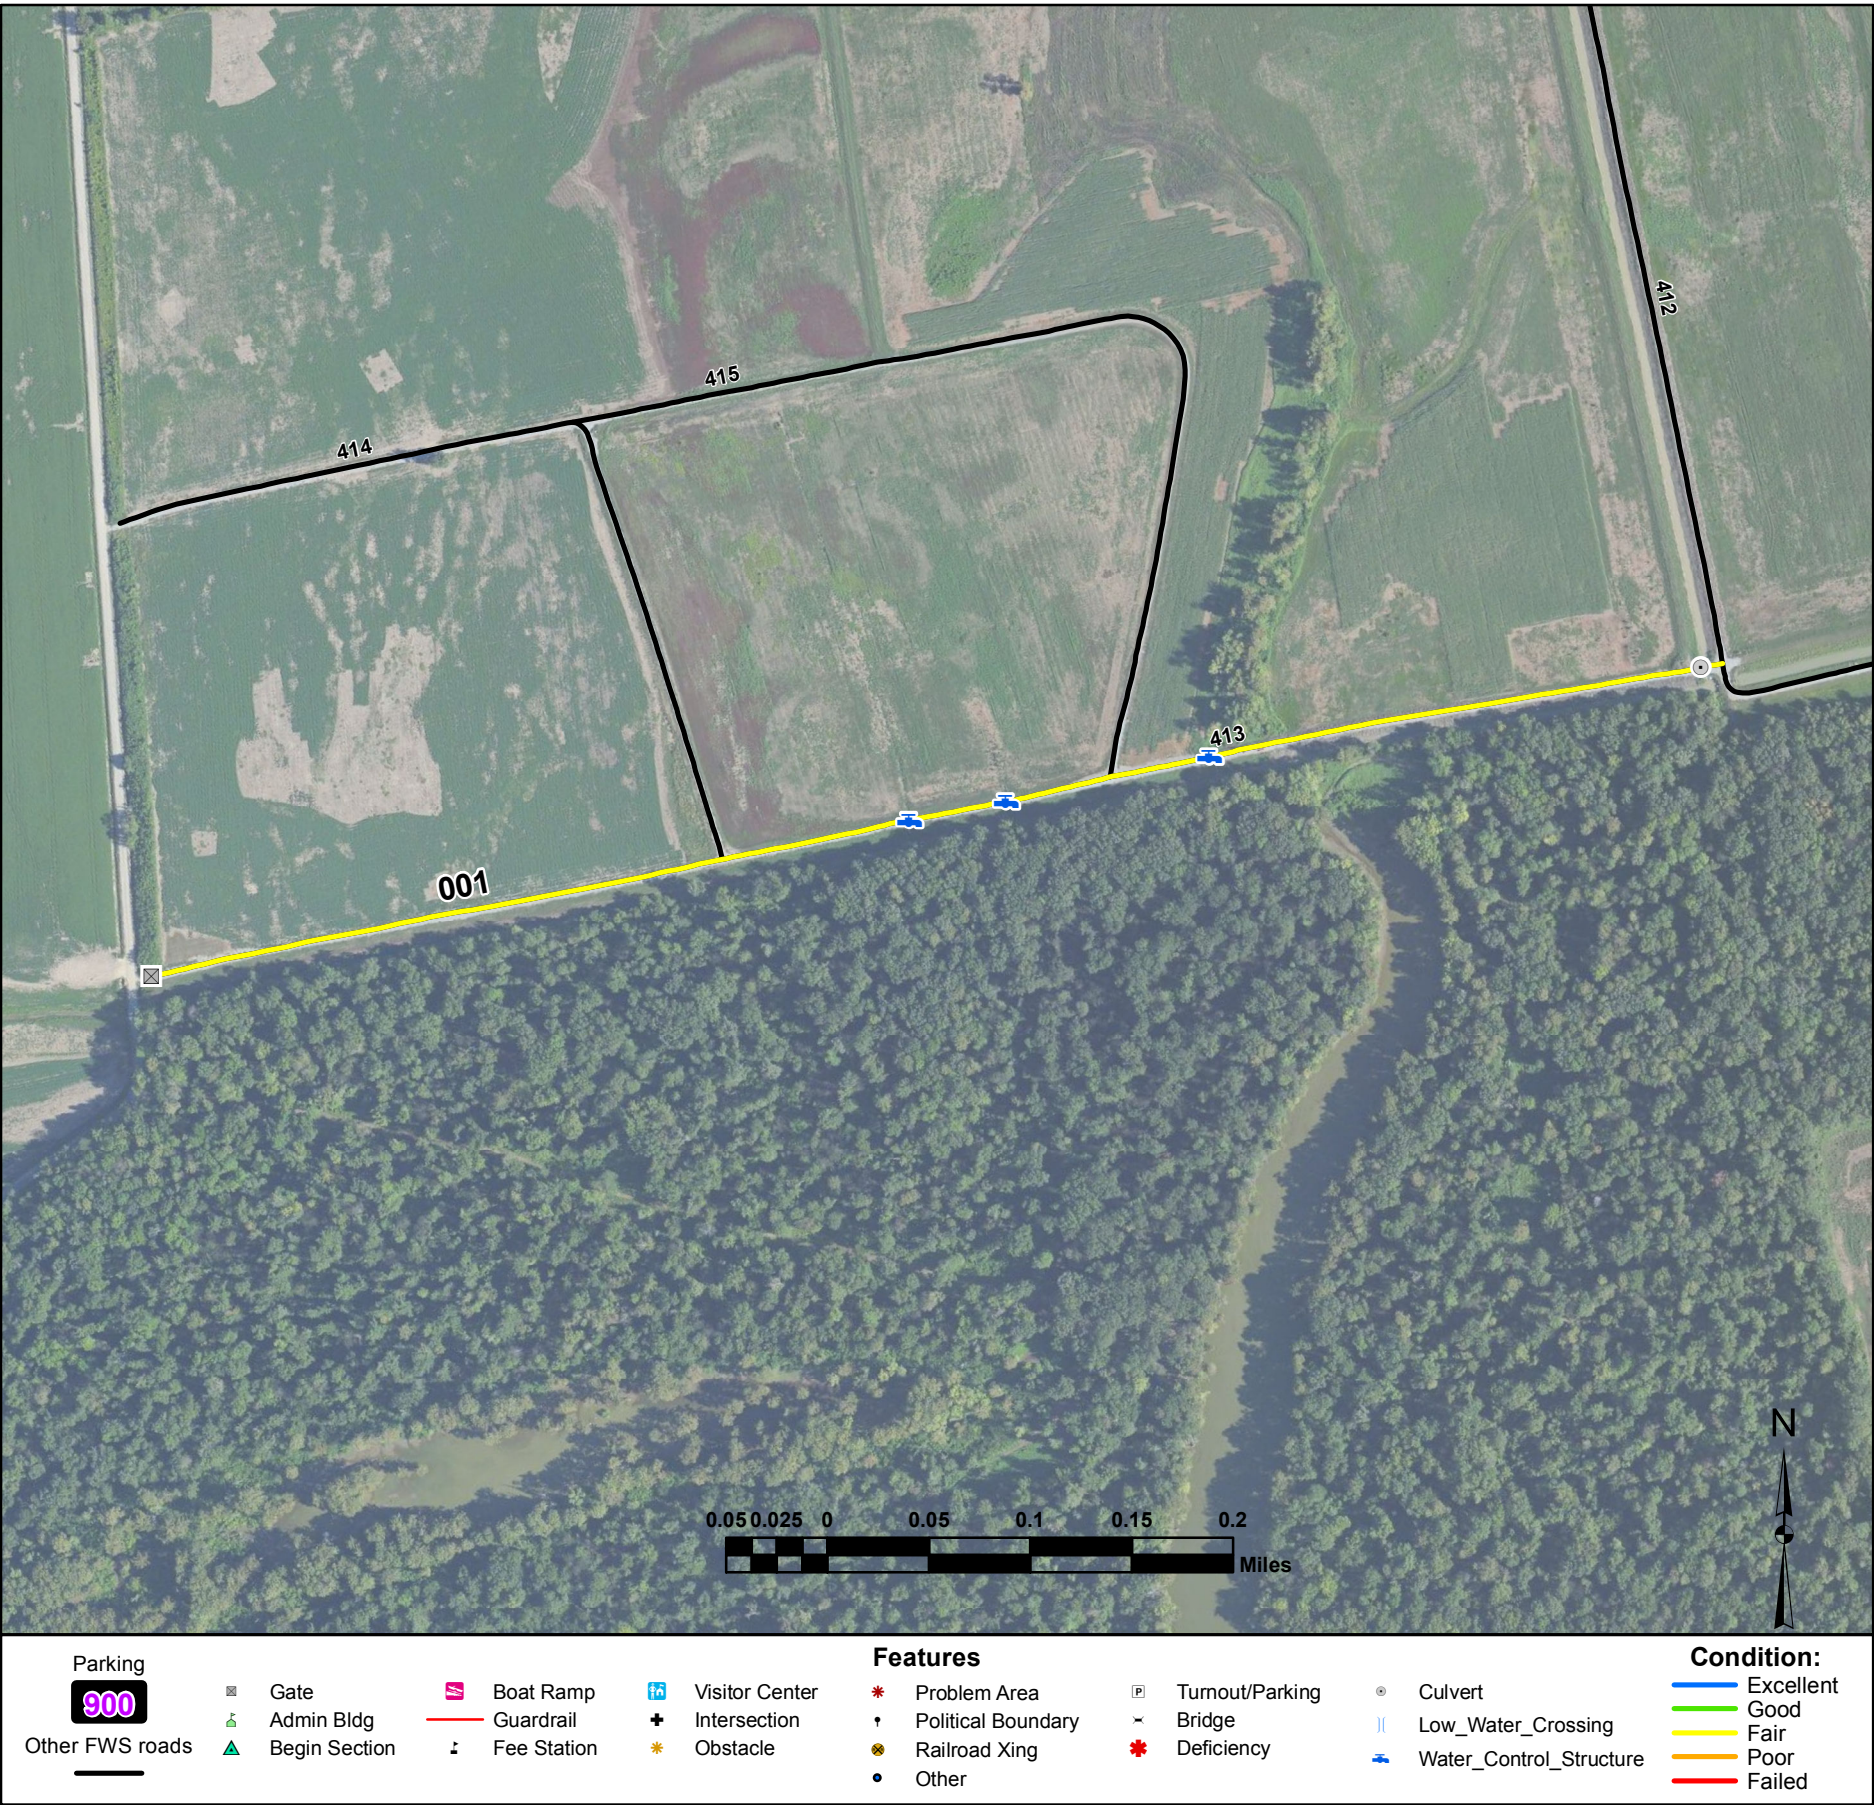

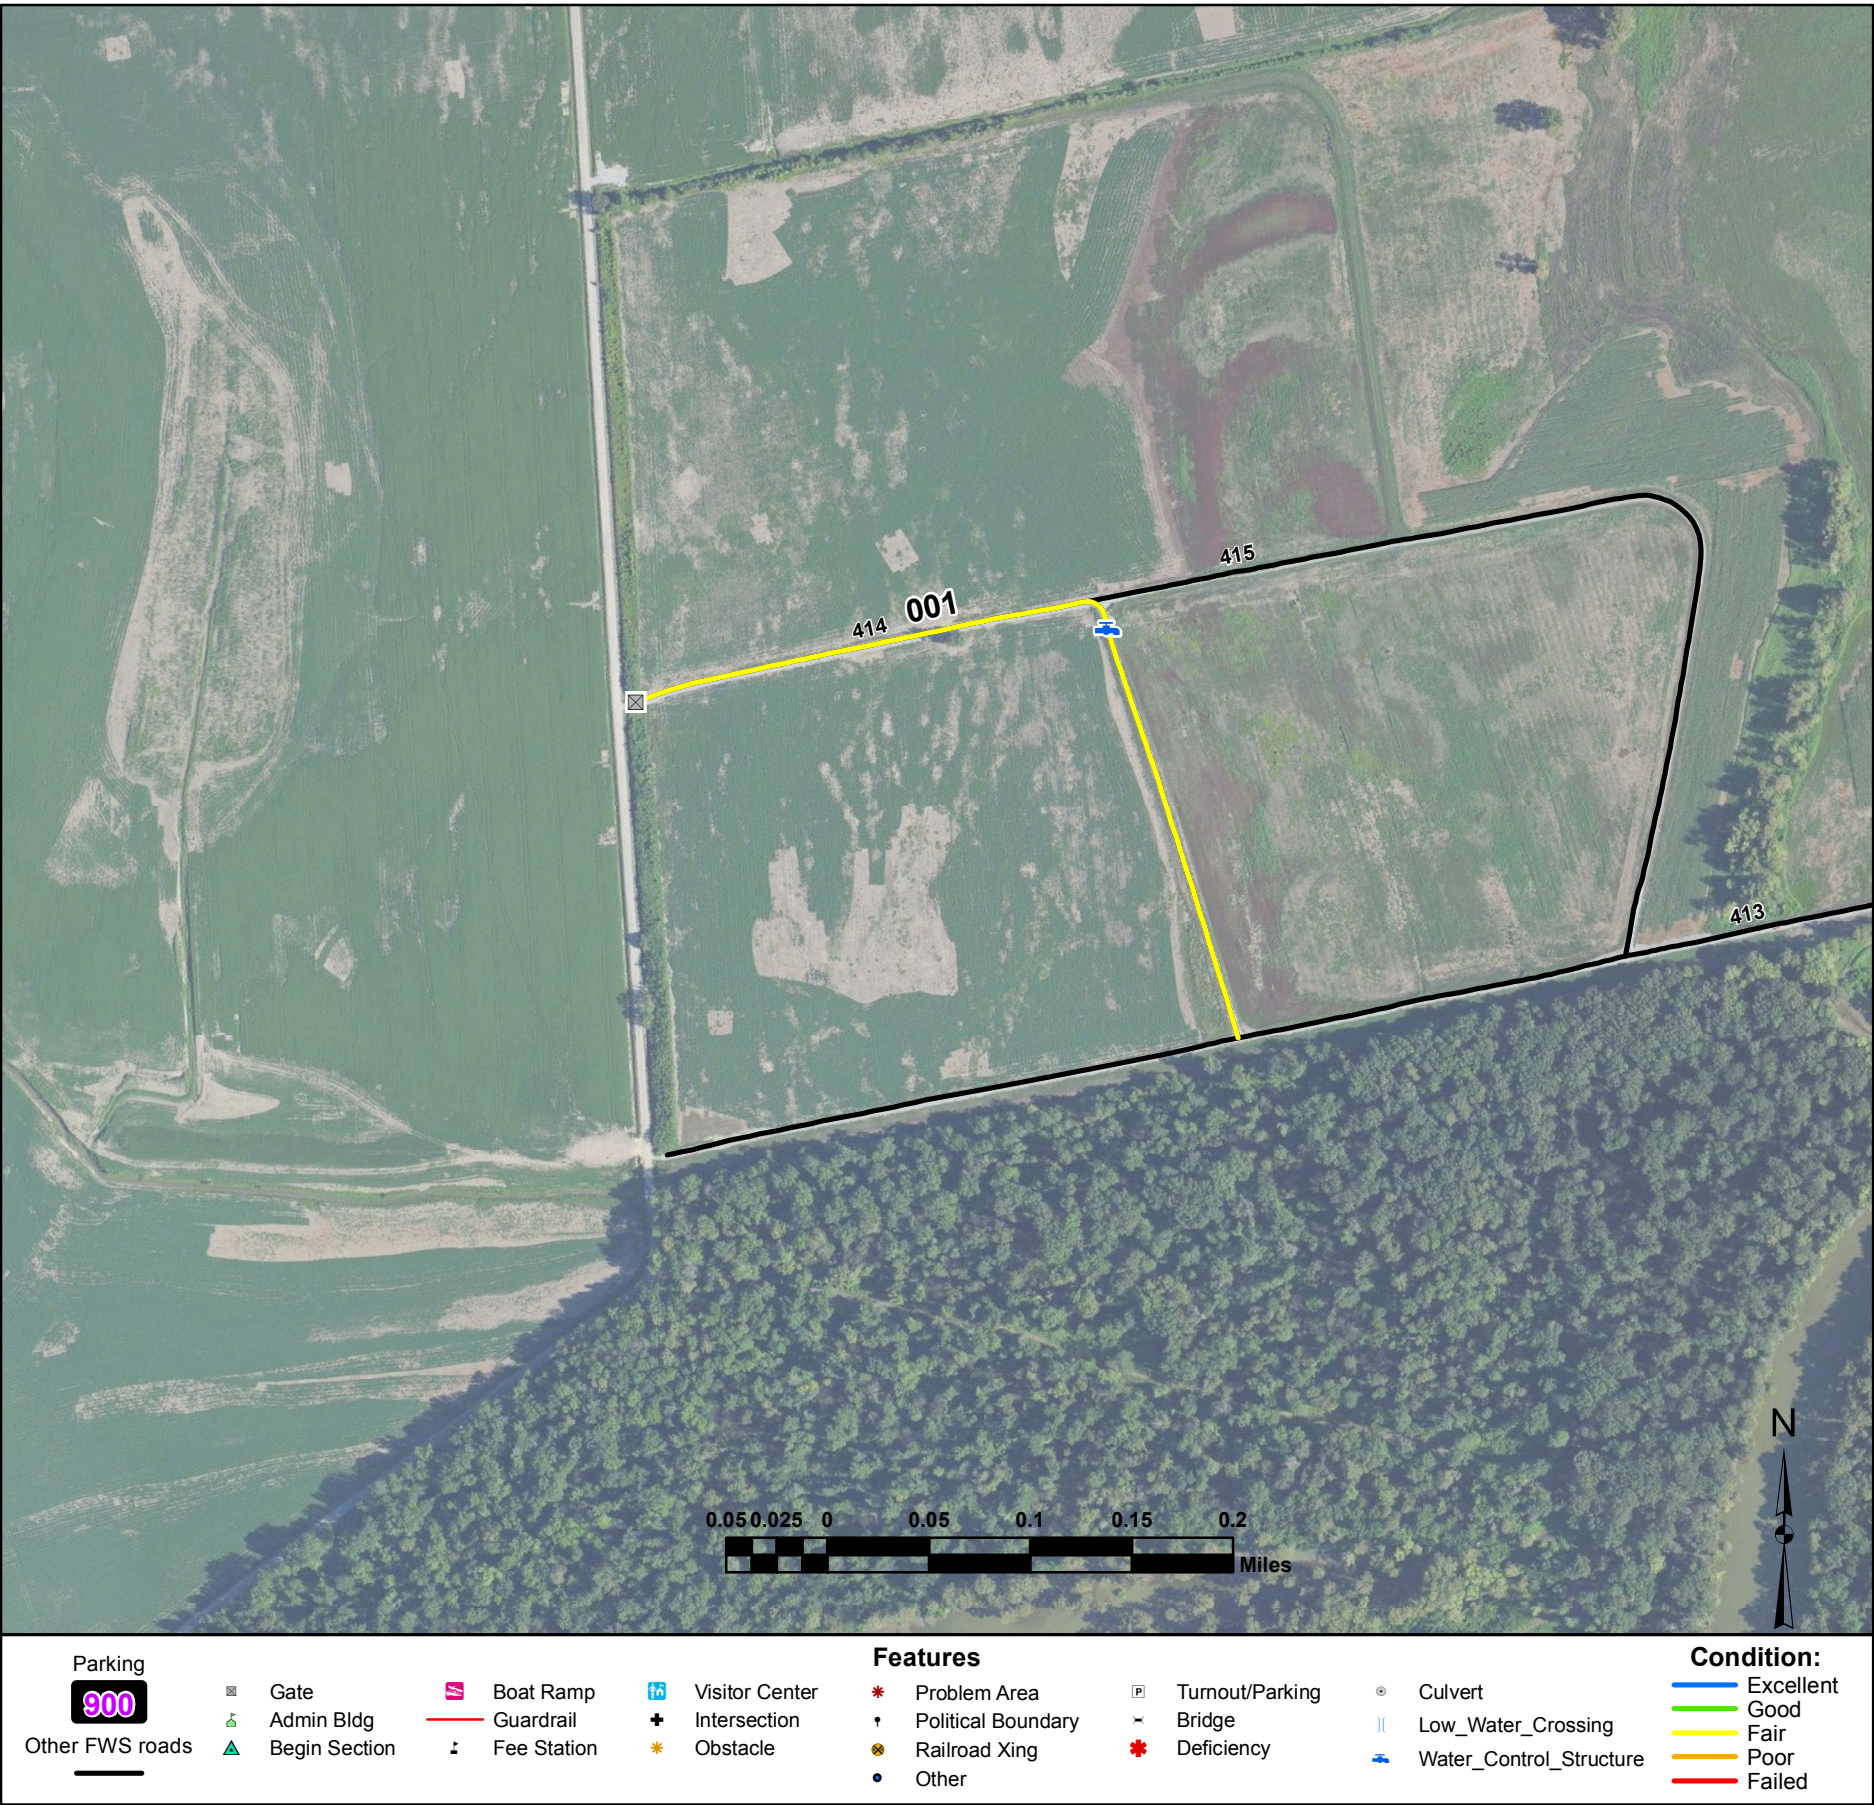

Problem Area

Political Boundary

Railroad Xing

Other

Turnout/Parking

Bridge

Deficiency

Culvert

Low_Water_Crossing

Water_Control_Structure

Excellent

Good

Fair

Poor

Failed

Levee North and East of 9W Road


From Levee 9-11 South Road (Route 413) to Private Land

Route Number: 414

Total Route Mileage: 0.43

Asset Number	-				
Section Number	001				
Section Length (miles)	0.43				
Inspection Date	07-11-2011				
Surface Type	Gravel				
Number of Lanes	1				
Roadway Width (feet)	14				
Condition	Fair				
Remaining Service Life (years)	4				
Estimated Cost to Repair	\$1,500				
Current Replacement Value	\$286,200				

Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
Water Control Structure	001-0.18						
Gate	001-0.43						

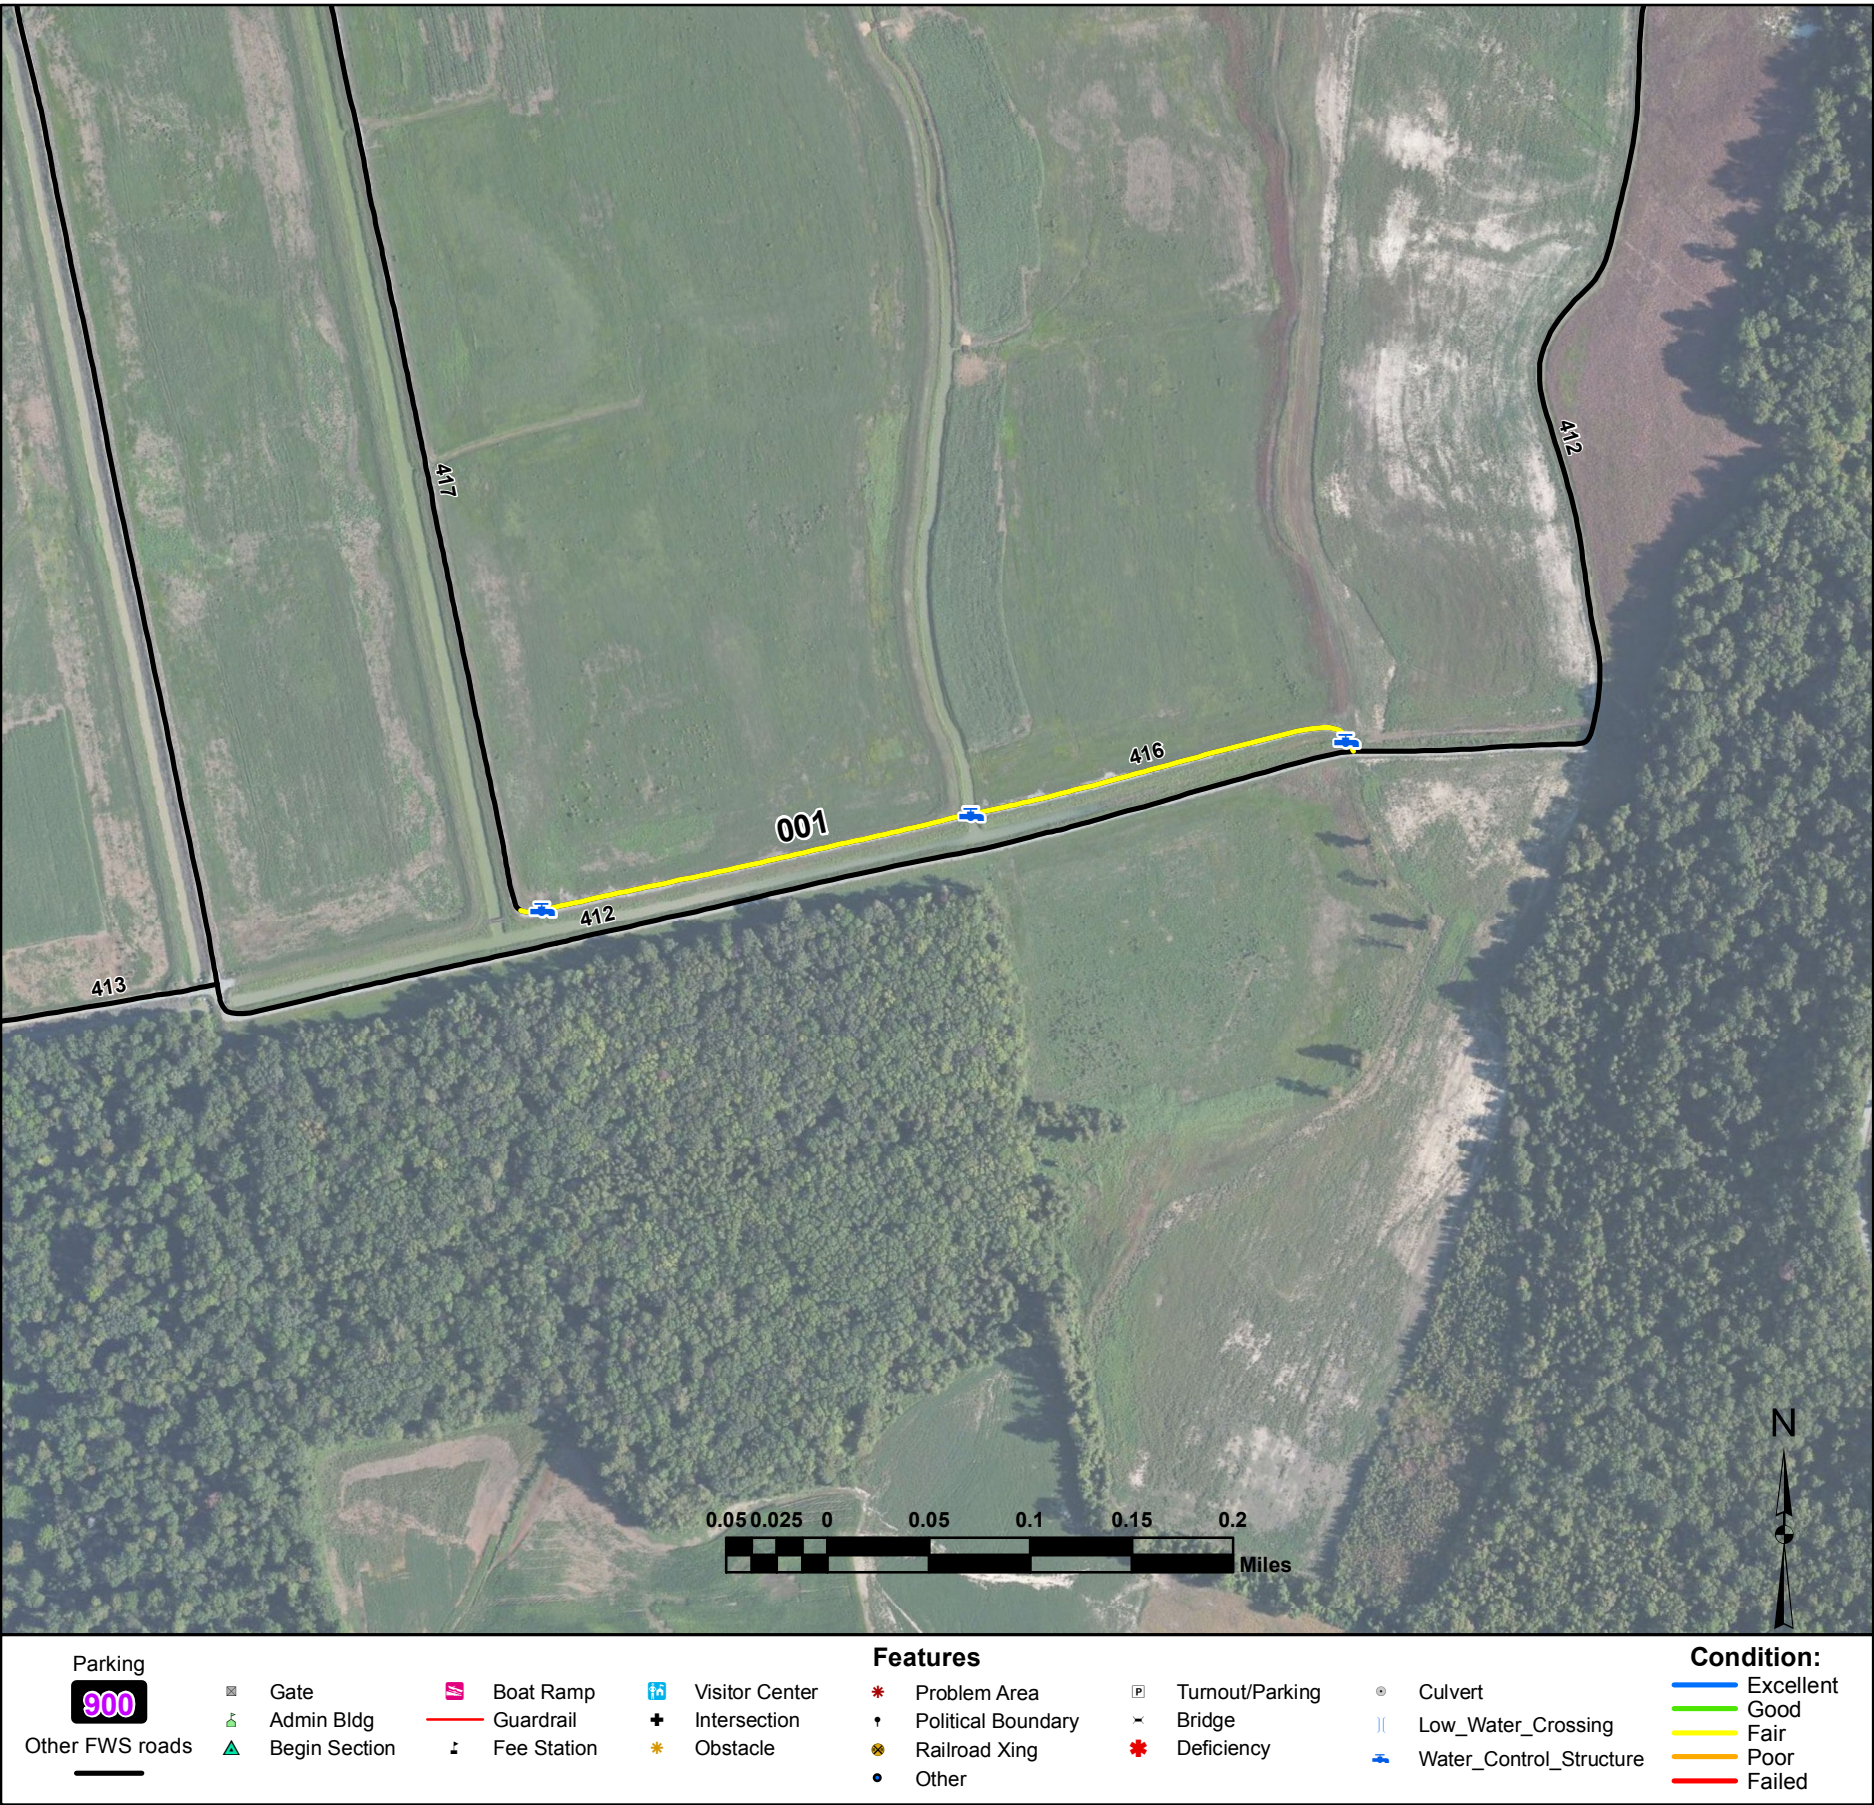

Culvert

Low_Water_Crossing

Water_Control_Structure

Excellent

Good

Fair

Poor

Failed

Levee South of 7 and 8 Road


From Sanctuary Service Road (Route 412) to Levee 7 West Road (Route 417)

Route Number: 416

Total Route Mileage: 0.40


Asset Number	-				
Section Number	001				
Section Length (miles)	0.40				
Inspection Date	07-11-2011				
Surface Type	Gravel				
Number of Lanes	1				
Roadway Width (feet)	12				
Condition	Fair				
Remaining Service Life (years)	4				
Estimated Cost to Repair	\$1,400				
Current Replacement Value	\$266,600				

Features	Mile Post	Features	Mile Post	Features	Mile Post	Features	Mile Post
Water Control Structure	001-0.01						
Water Control Structure	001-0.18						
Water Control Structure	001-0.39						

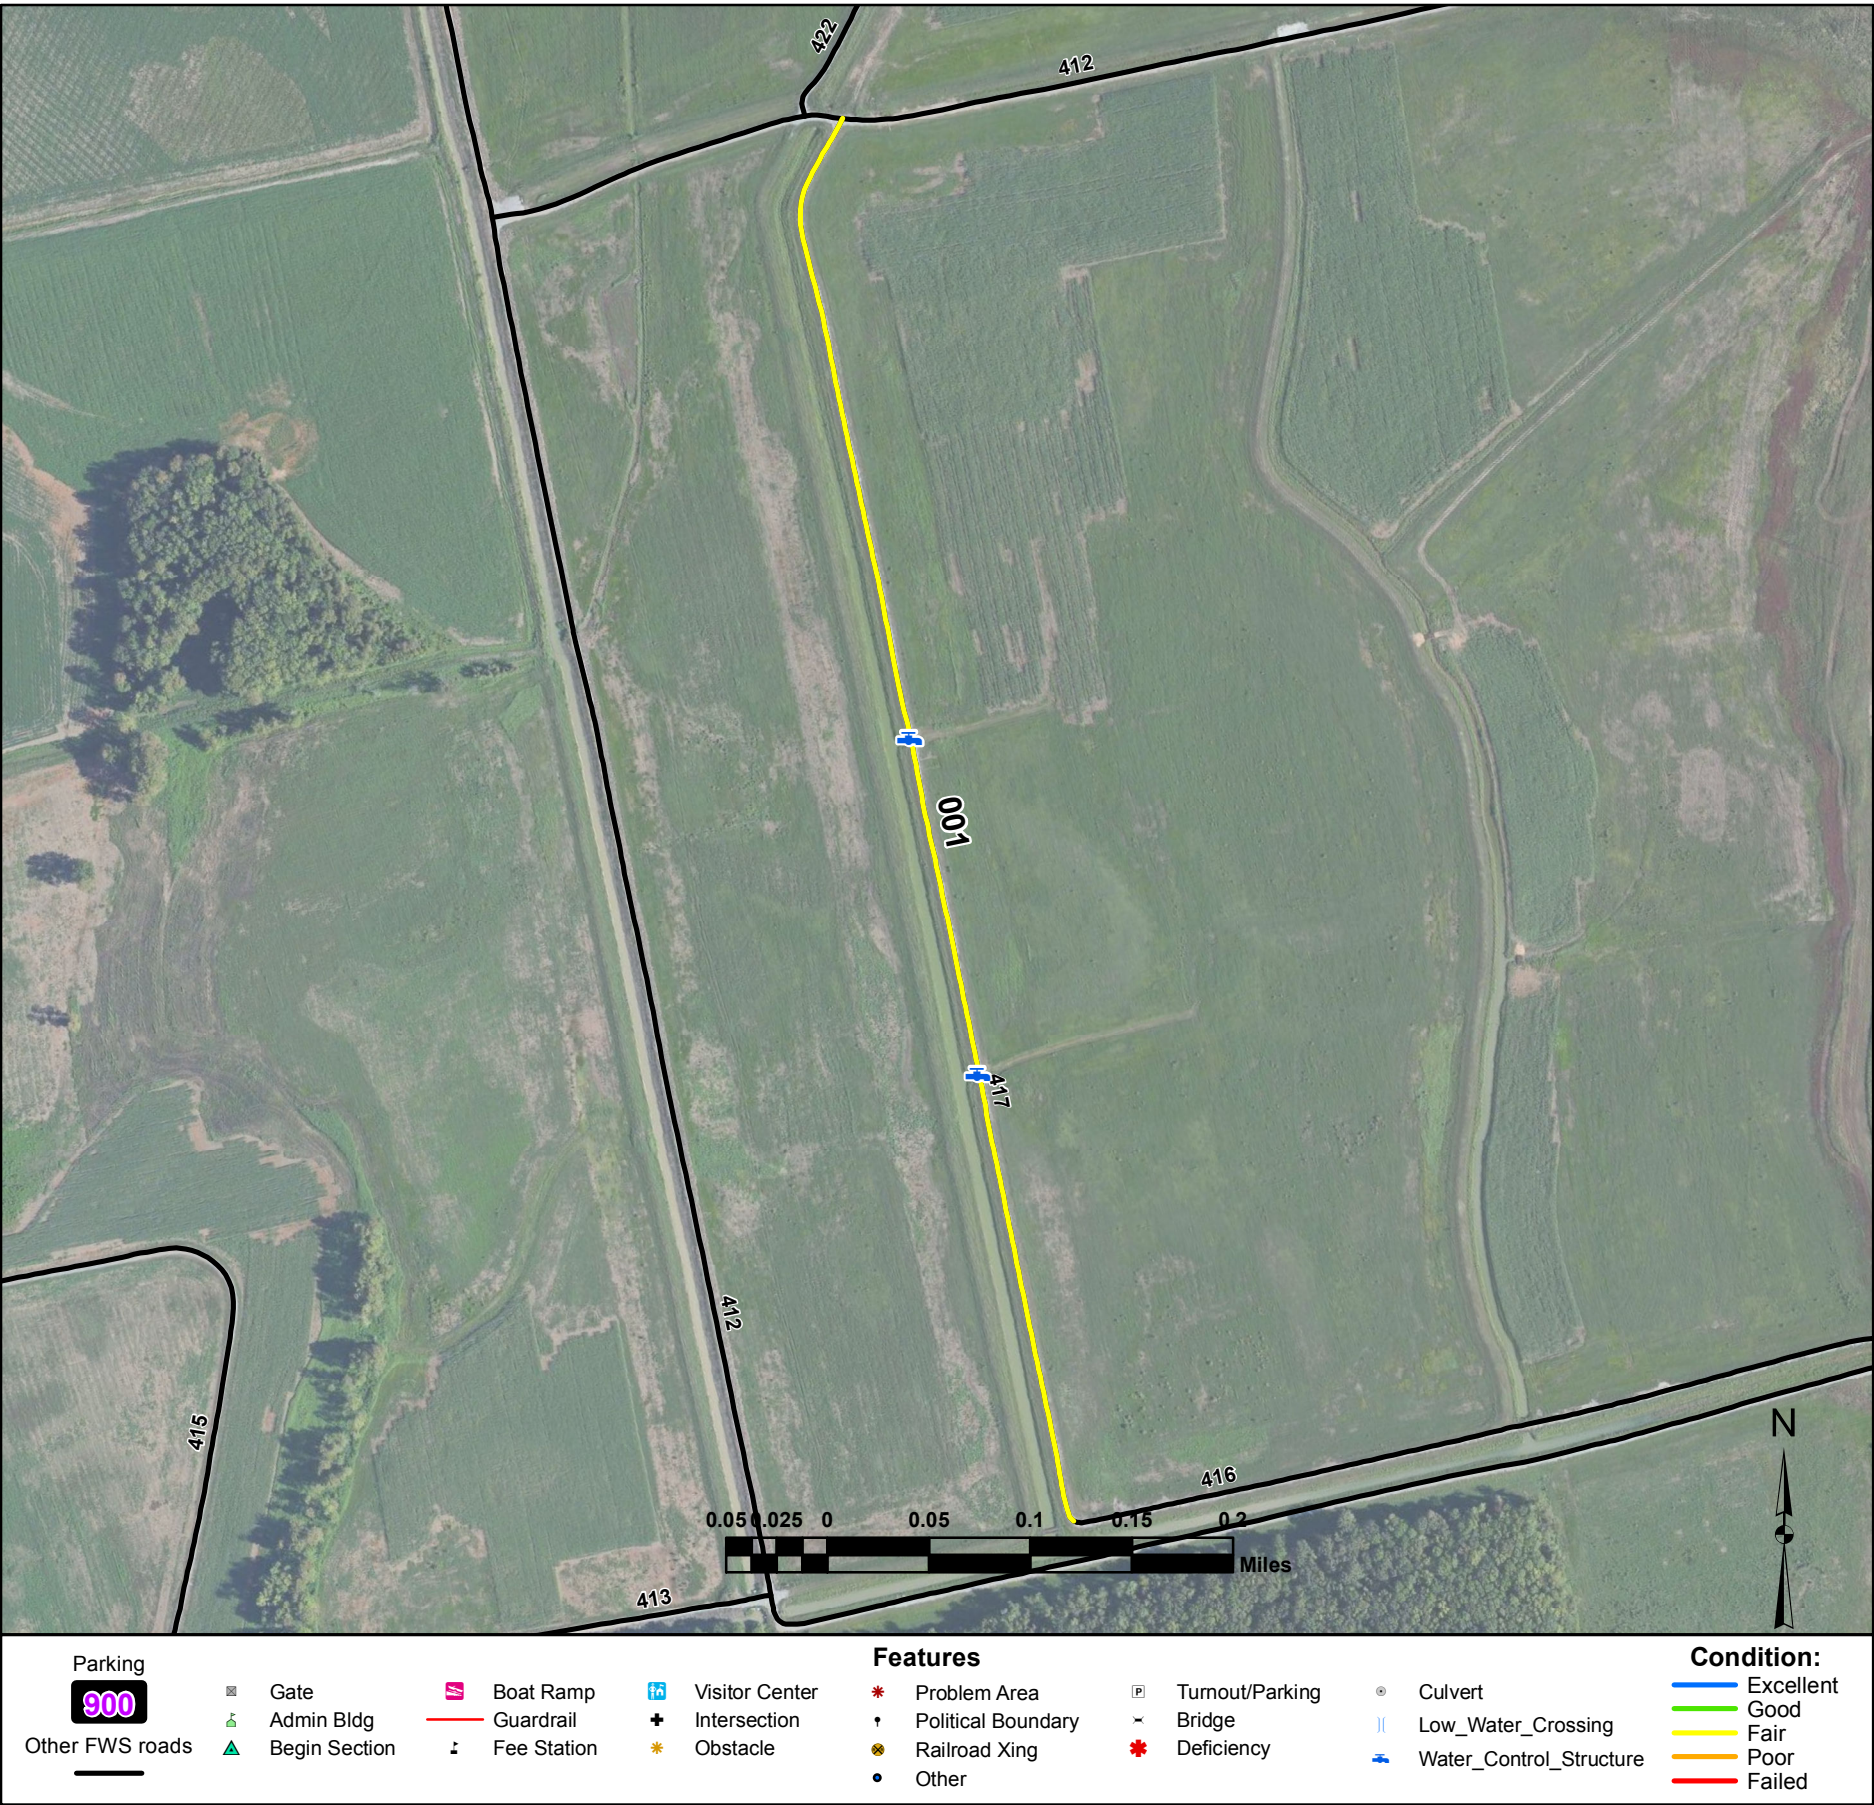

800: Shop Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
	07/11/2011	Gravel	23,318	Fair	6,000

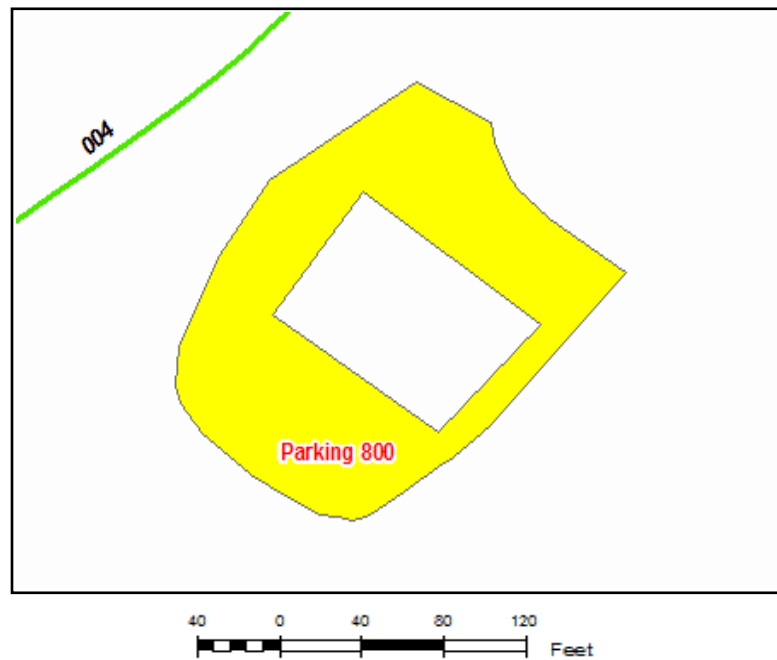


900: Headquarters Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10016258	07/11/2011	Gravel	51,313	Good	7,500




901: Wardlows Chute Boat Ramp Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10016260	07/11/2011	Asphalt	22,262	Fair	18,600

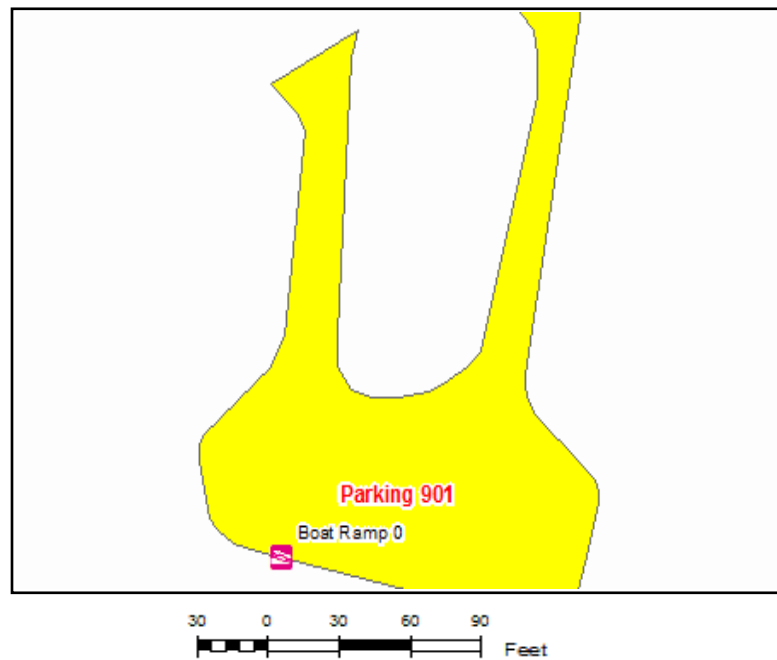


902: Barr Road Campground Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10016262	07/11/2011	Gravel	21,008	Failed	69,600

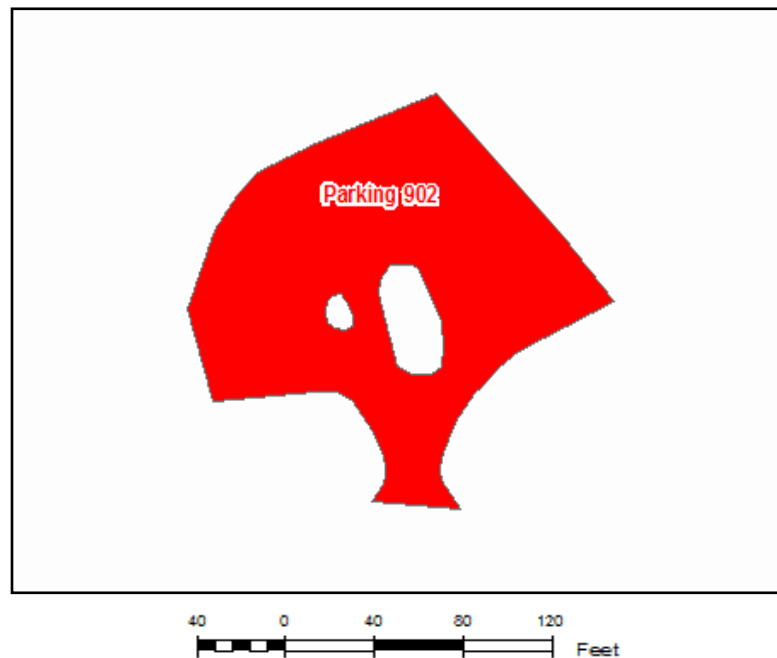


903: Ed Jones Boat Ramp Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10016272	07/11/2011	Gravel	33,961	Fair	8,800

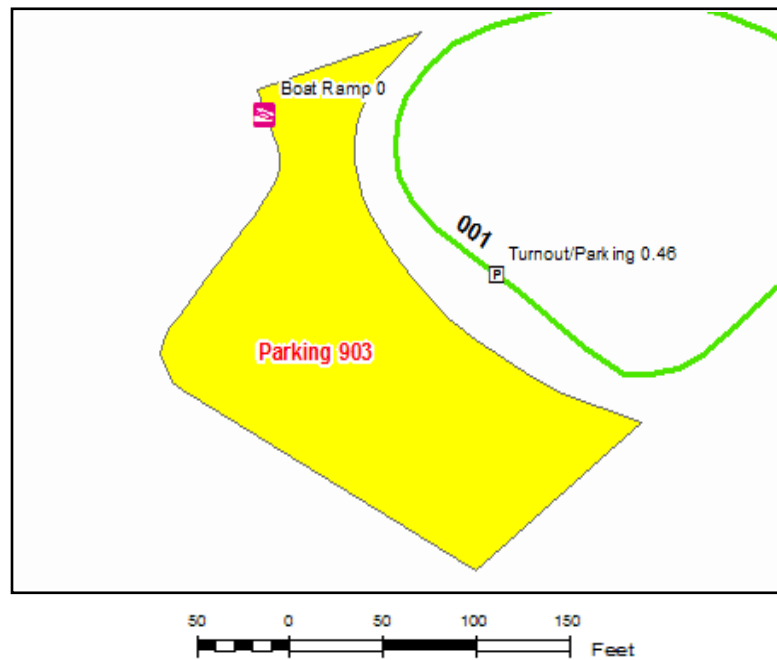

904: Observation Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
	07/11/2011	Gravel	7,020	Good	1,000

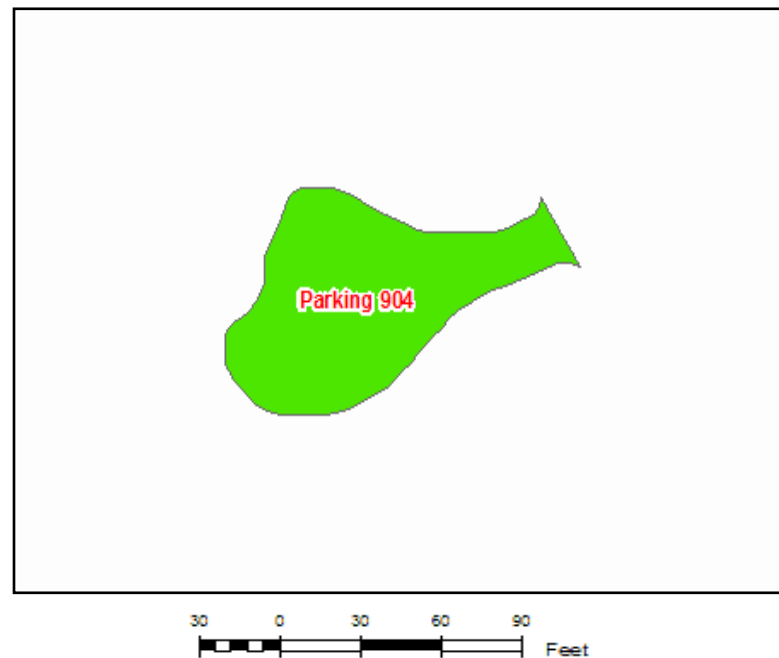

Chickasaw Bridge Inventory					
Rte #	Milepost	NBIS #	Sufficiency Rating	Functionally Obsolete	Structurally Deficient
No Bridges to report					

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 100 ROUTE NAME: Ed Jones Boat Ramp Road



Photo # CHIC_C4_0380 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 400 ROUTE NAME: Hendren Road



Photo # CHIC_C4_0378 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 401 ROUTE NAME: Sycamore Road



Photo # CHIC_C4_0383 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 402 ROUTE NAME: Bar Plum Road



Photo # CHIC_C4_0384 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 402 ROUTE NAME: Bar Plum Road



Photo # CHIC_C4_0385 - MP 0.12 - Problem Area 001

ROUTE NUMBER: 403 ROUTE NAME: Bar Field Road



Photo # CHIC_C4_0386 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 403 ROUTE NAME: Bar Field Road



Photo # CHIC_C4_0387 - MP 0.11 - Problem Area 001

ROUTE NUMBER: 404 ROUTE NAME: Rush Slough Road



Photo # CHIC_C4_0394 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 404 ROUTE NAME: Rush Slough Road



Photo # CHIC_C4_0395 - MP 0.45 - Problem Area 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 405 ROUTE NAME: Right Hand Arm Road



Photo # CHIC_C4_0396 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 405 ROUTE NAME: Right Hand Arm Road



Photo # CHIC_C4_0397 - MP 0.49 - Problem Area 001

ROUTE NUMBER: 406 ROUTE NAME: Cherry Bark Lane



Photo # CHIC_C4_0398 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 406 ROUTE NAME: Cherry Bark Lane



Photo # CHIC_C4_0399 - MP 0.44 - Problem Area 001

ROUTE NUMBER: 407 ROUTE NAME: Camp Slough Road



Photo # CHIC_C4_0400 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 408 ROUTE NAME: Loop Road



Photo # CHIC_C4_0404 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 408 ROUTE NAME: Loop Road



Photo # CHIC_C4_0405 - MP 0.57 - Problem Area 001

ROUTE NUMBER: 409 ROUTE NAME: Dry Arm Road



Photo # CHIC_C4_0406 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 409 ROUTE NAME: Dry Arm Road



Photo # CHIC_C4_0407 - MP 0.11 - Problem Area 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 410 ROUTE NAME: Warpool Road



Photo # CHIC_C4_0412 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 410 ROUTE NAME: Warpool Road



Photo # CHIC_C4_0413 - MP 0.15 - Problem Area 001

ROUTE NUMBER: 411 ROUTE NAME: Boneyard Road



Photo # CHIC_C4_0416 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 411 ROUTE NAME: Boneyard Road



Photo # CHIC_C4_0417 - MP 0.10 - Begin Section 002

ROUTE NUMBER: 412 ROUTE NAME: Sanctuary Service Road



Photo # CHIC_C4_0419 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 412 ROUTE NAME: Sanctuary Service Road



Photo # CHIC_C4_0420 - MP 0.97 - Begin Section 002

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 412 ROUTE NAME: Sanctuary Service Road



Photo # CHIC_C4_0427 - MP 1.96 - Begin Section 003

ROUTE NUMBER: 412 ROUTE NAME: Sanctuary Service Road



Photo # CHIC_C4_0430 - MP 2.48 - Begin Section 004

ROUTE NUMBER: 412 ROUTE NAME: Sanctuary Service Road



Photo # CHIC_C4_0431 - MP 3.21 - Begin Section 005

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 413 ROUTE NAME: Levee 9 -11 South Road



Photo # CHIC_C4_0436 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 413 ROUTE NAME: Levee 9 -11 South Road



Photo # CHIC_C4_0437 - MP 0.01 - Round Culvert Section 001

ROUTE NUMBER: 414 ROUTE NAME: Levee North and East of 9W Road



Photo # CHIC_C4_0446 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 415 ROUTE NAME: Levee North and East of 9E Road



Photo # CHIC_C4_0450 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 416 ROUTE NAME: Levee South of 7 and 8 Road



Photo # CHIC_C4_0451 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 417 ROUTE NAME: Levee 7 West Road



Photo # CHIC_C4_0463 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 418 ROUTE NAME: Unit 1 Levee Road



Photo # CHIC_C4_0467 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 418 ROUTE NAME: Unit 1 Levee Road



Photo # CHIC_C4_0470 - MP 0.38 - Begin Section 002

ROUTE NUMBER: 419 ROUTE NAME: Levee 2 North and South Road



Photo # CHIC_C4_0477 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 420 ROUTE NAME: Gar Pond Road



Photo # CHIC_C4_0401 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 420 ROUTE NAME: Gar Pond Road



Photo # CHIC_C4_0402 - MP 0.13 - Problem Area 001

ROUTE NUMBER: 421 ROUTE NAME: South of Campground Road



Photo # CHIC_C4_0492 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 421 ROUTE NAME: South of Campground Road



Photo # CHIC_C4_0493 - MP 0.22 - Problem Area 001

ROUTE NUMBER: 422 ROUTE NAME: Levee 4 South and East Road



Photo # CHIC_C4_0466 - MP 0.00 - Begin Section 001

Accident Summary

Number of Accidents Reported	Timespan of Accidents	Injuries	Fatalities
0	No Accidents to Report	0	0

APPENDIX

TABLE 1 - GENERAL FWS ROAD FUNCTIONAL CLASSIFICATION	
Class I	Principal Refuge Road (Public Roads) - Routes that constitute the main access route, main auto tour route, or thoroughfare for refuge visitors. These routes are accessible by 2WD vehicles. Routes are numbered from 10 to 99.
Class II	Connector Refuge Road (Public Roads) - Routes that provide circulation within the refuge. These routes can also provide access to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, education centers, etc. These routes are accessible by 2WD vehicles. Routes are numbered from 100 to 199.
Class III	Special Purpose Refuge Road (Public Roads) - Roads that provide circulation within special use areas such as campgrounds or public concessionaire facilities or access to remote areas of the refuge. These routes may not be 2WD accessible. Routes are numbered from 200 to 299
Class IV	Administrative Access Road (Administrative Roads) - Routes intended for access to administrative developments or structures such as maintenance offices, employee quarters, or utility areas. These routes are accessible by 2WD vehicles. These routes may restrict access to the general public. Routes are numbered from 300 to 399.
Class V	Restricted Road (Administrative Roads) - Routes normally closed to the public, such as maintenance roads, service roads, patrol roads, and fire breaks. These routes may be open to the public for a short period of time for a special use, such as hunting access. These routes may not be 2WD accessible. Routes are numbered from 400 to 499.

A refuge road system contains those routes within or giving access to a refuge or other unit of the FWS that are administered by the FWS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a refuge road is not based on traffic volumes or design speed, but on the intended use or function of that route

DESCRIPTION OF RATING SYSTEM

Rating Data is collected on four different surface types: Asphalt, Concrete, Gravel, and Native. The Utah LTAP Center's Remaining Service Life (RSL) system is used for all surface types. The RSL system is based on the Strategic Highway Research Program's (SHRP) Distress Identification Manual.

Asphalt Rating System

Data is collected on the following distresses and conditions:

- **Fatigue Cracking** - Interconnected cracks forming small irregular shapes.
- **Longitudinal Cracking** - Cracks running parallel with the roadway, in the direction of traffic.
- **Transverse Cracking** - Cracks perpendicular to the roadway, going across the lane or lanes.
- **Block Cracking** - Interconnected cracks forming large blocks.
- **Edge Cracking** - Cracks running along the edge of the pavement surface.
- **Patches** - Original surface repaired with new asphalt patch material.
- **Potholes** - Holes or depressions in the pavement.
- **Rutting** - surface depressions in the wheel paths.
- **Roughness** - Evenness of pavement for serviceability.
- **Drainage** - Ability of the road surface to drain water based on proper slope.

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

Fatigue, longitudinal, transverse, block, and edge cracking, along with patching and potholes are rated on a 0 - 9 scale (0 = no distress, 9 = maximum distress). The rating given is based on the extent and the severity of the distress. Rutting, roughness, and drainage are rated on a 0 - 3 scale (0 = excellent, 3 = poor). Each distress type has given Remaining Service Life (RSL) values (in years) based on the rating for that particular distress. The distress with the rating resulting in the lowest RSL value is considered to be the governing distress. That value is then assigned as the RSL of the road segment.

Concrete Rating System

Data is collected on the following distresses and conditions:

- **Spalling of Joints** - Chipping, breaking, or cracking of slab edges
- **Joint Seal Damage** - Any damage or condition that enables materials or water to infiltrate into the joint from the surface.
- **Corner Breaks** - A portion of the slab separated by a crack that intersects the adjacent transverse and longitudinal joints, forming approximately a 45° angle to the direction.
- **Broken Slabs** - Faulting and/or cracking localized to individual slabs.

- **Faulting** – Difference in elevation across a crack or joint.
- **Longitudinal Cracking** – Cracks in the pavement running parallel to road.
- **Transverse Cracking** - Cracks in the pavement running perpendicular to the direction of traffic.
- **Patch Deterioration** – Faulting, settling, or cracking of previously placed patch
- **Map Cracking** – A series of cracks that extend only into the upper surface of the Slab

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

The rating procedure for concrete pavement is the same as that for asphalt pavement described previously. Each of the distresses described above are rated on the same 0 – 9 scale. The governing distress is then determined and the RSL associated with that distress is assigned to the road segment.

Gravel and Native Rating System

Data is collected on the following distresses and conditions:

- **Cross Section (Crown)** - Roadway built so that the center is higher than the shoulder, to prevent water from pooling on roadway.
- **Roadside Drainage** - Roadside ditches and culverts to handle water flow and prevent pooling on the roadside.
- **Corrugations (Washboarding)** - Small trenches or holes developing perpendicular to the roadway.
- **Potholes** - Holes or depressions in the roadway.
- **Rutting** - Depressions running parallel with the roadway, in the wheelpaths.
- **Dust** - Amount of dust caused by traffic.
- **Loose Aggregate (Gravel Only)** - Loose gravel, typically piled up on the roadway edges or centerline.

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

The rating procedure for unpaved roads is the same as that for asphalt and concrete pavements described previously. Of the distresses described above, corrugations, potholes, rutting, and loose aggregate are rated on the same 0 – 9 scale previously mentioned. Cross section, roadside drainage, and dust are rated on the same 0 – 3 scale described for asphalt pavement. The governing distress is then determined and the RSL associated with that distress is assigned to the road segment.

Condition Descriptions by Surface Type

The following definitions are used to describe pavement condition for the various surface types. These are general guidelines for condition indications.

Asphalt

Excellent – Recently constructed or overlaid road where construction or overlay was performed correctly- No maintenance required. RSL = 19-20 years.

Good – Low extent longitudinal and transverse cracks. All cracks are 1/4" or less with little or no crack erosion. Patches are in good condition and applied correctly. Routine Maintenance recommended. RSL = 13-18 years.

Fair - Roads are in good structural condition with little or no fatigue cracking. Longitudinal, transverse, and edge cracking is at medium extent and severity. Block cracking is not extensive. Any patches are in good condition. Preventative maintenance recommended. RSL = 7-12 years.

Poor - Road beginning to show signs of structural distress. Fatigue cracking is medium to high extent and medium severity. Cracking will be severe. Surface may have severe block cracking and show. Patches are in fair to poor condition. There is moderate distortion or rutting and occasional potholes. Rehabilitation recommended. RSL = 1-6 years.

Failed - Road is severely deteriorated. Signs of structural failure appear along with severe and extensive fatigue cracking, distortion, potholes, or extensive patches in poor condition. Reconstruction recommended. RSL = 0 years.

Concrete

Excellent - New pavement. No maintenance required. RSL = 19-20 years

Good - First signs of transverse cracking, patch or repair, more extensive pop-outs, or scaling. Sealing or routine maintenance recommended. RSL = 13-18 years.

Fair – Pavement has joint or crack spalling, and/or faulting, along with cracking at corners with broken pieces. Any Patches are in fair condition and faulting is at a minimum. Preventative maintenance recommended. RSL = 7-12 years.

Poor - Joints and cracks are open 1 inch, spalled, or patched. Faulting is more severe. Rehabilitation recommended. RSL = 1-6 years.

Failed - Most slabs have failed structurally, and faulting is severe. Reconstruction recommended. RSL = 0 years.11-9

The following table shows the relationship between RSL and condition.

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE (Asphalt and Concrete Pavements)								
	FAILED	POOR		FAIR		GOOD		EXCELLENT
RSL Years	0	1-3	4-6	7-9	10-12	13-15	16-18	19-20

Gravel and Native

Note - Native surfaces do not have a gravel layer.

Excellent - Newly constructed road that has been constructed properly with proper crown, drainage and gravel layer. Little or no distress. No maintenance recommended. RSL = 8-10 years.

Good - Crown, drainage provisions, and gravel layer are in good condition. Distress limited to traffic effects such as dust, loose aggregate, and low severity corrugations (wash boarding). RSL = 5-7 years.

Fair - Adequate drainage and crown through majority of roadway. Crown repair, ditch improvement may be necessary. Road has more severe corrugations and potholes. Preventative maintenance recommended. RSL = 3-4 years.

Poor - Travel at slow speeds is necessary. Additional gravel layer needed to carry traffic. Poor crown. Ditching is inadequate and rutting is extensive and severe. Rehabilitation recommended. RSL = 1-2 years.

Failed - Travel is difficult, and road may be closed at times. Rutting and Corrugations are very severe. Total Reconstruction of road is recommended. RSL = 0 years.

The following table shows the RSL values for gravel and native roads in terms of excellent, good, fair, poor, and failed condition.

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE (Gravel and Native Surfaces)					
	FAILED	POOR	FAIR	GOOD	EXCELLENT
RSL Years	0	1-2	3-4	5-7	8-10

NATIVE PRIMITIVE/IMPROVED RATING SHEET

Cross Section (Crown)*

Severity	Condition		Description
	No Defects	0	Crown 4-6" with no restriction of water flow from centerline to ditch.
	Minor Defects	1	Inadequate or inconsistent crown. Drainage to ditch may be restricted.
	Moderate Defects	2	Flat crown, drainage to ditch restricted.
	Major Defects	3	Reverse crown, bowl-shaped road, drainage on roadway

Rutting

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 6"	1	2	3
	Med 6-12"	4	5	6
	High > 12"	7	8	9

Roadside Drainage*

Severity	Condition		Description
	No Defects	0	Wide, deep ditches (>4') with no restriction to water flow.
	Minor Defects	1	Adequate ditches (>2' deep), minor obstructions restrict water flow.
	Moderate Defects	2	Shallow, narrow and obstructed ditches. Minor erosion of road.
	Major Defects	3	No ditch, drainage on roadway with moderate to severe erosion.

Potholes

Severity	Extent (Area)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 6"	1	2	3
	Med 6-12"	4	5	6
	High > 12"	7	8	9

Dust

Severity	Condition		Description
	No Defects	0	No obstruction to sight distance.
	Minor Defects	1	Sight distance > 550'
	Moderate Defects	2	Sight distance 225'-550'
	Major Defects	3	Sight distance < 225'

Corrugations

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 3"	1	2	3
	Med 3-6"	4	5	6
	High > 6"	7	8	9

* Crown and Drainage are not rated for roads that have no constructed crown or drainage. This applies to Native and Gravel roads.

GRAVEL RATING SHEET

Cross Section (Crown)

Severity	Condition		Description
	No Defects	0	Crown 4-6" with no restriction of water flow from centerline to ditch.
	Minor Defects	1	Inadequate or inconsistent crown. Drainage to ditch may be restricted.
	Moderate Defects	2	Flat crown, drainage to ditch restricted.
	Major Defects	3	Reverse crown, bowl-shaped road, drainage on roadway

Rutting

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

Roadside Drainage

Severity	Condition		Description
	No Defects	0	Wide, deep ditches (>4') with no restriction to water flow.
	Minor Defects	1	Adequate ditches (>2' deep), minor obstructions restrict water flow.
	Moderate Defects	2	Shallow, narrow and obstructed ditches. Minor erosion of road.
	Major Defects	3	No ditch, drainage on roadway with moderate to severe erosion.

Potholes

Severity	Extent (Area)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

Dust

Severity	Condition		Description
	No Defects	0	No obstruction to sight distance.
	Minor Defects	1	Sight distance > 550'
	Moderate Defects	2	Sight distance 225'-550'
	Major Defects	3	Sight distance < 225'

Corrugations

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 2"	1	2	3
	Med 2-4"	4	5	6
	High > 4"	7	8	9

* Crown and Drainage are not rated for roads that have no constructed crown or drainage. This applies to Native and Gravel roads.

Loose Aggregate

Severity	Extent (Area)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

ASPHALT RATING SHEET

Fatigue Cracking

Severity	Extent			
	No Defects	Low 1 crack WP	Med 2 cracks WP	High >30% length
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Edge Cracking

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	0-6" from curb	1	2	3
	6-18" from curb	4	5	6
	> 18" from curb	7	8	9

Longitudinal Cracking

Severity	Extent			
	No Defects	Low 1 crack full length	Med 2 cracks full length	High >2 cracks full length
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Block Cracking

Severity	Extent (Length)			
	No Defects	Low > 15x15' squares	Med 15-10' squares	High <10x10' squares
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Transverse Cracking

Severity	Extent (ft between cracks)			
	No Defects	Low > 200'	Med 200-50'	High < 50'
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Utility Cuts

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Drainage/Roughness/Rutting

Severity	Condition		Description
	No Defects	0	Wide, deep ditches with no obstructions, smooth ride, no rutting, no potholes.
	Minor Defects	1	Drainage may be obstructed, < 1" rutting, minor roughness.
	Moderate Defects	2	Poor drainage, 1-2" rutting, noticeable roughness, potholes < 6" wide.
	Major Defects	3	No drainage; > 2" rutting; potholes 6-12" wide create roughness requiring reduced speeds.

CONCRETE RATING SHEET

Spalling of Joints

Extent (% joints)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low Spalls < 3"	1	2	3
	Med Spalls 3-6"	4	5	6
	High Spalls > 6"	7	8	9

Broken Slabs

Extent (% slabs)				
No Defects	Low <5%	Med 5-15%	High >15%	
Severity	Low-no more than 3 pieces, no spalling/faulting	1	2	3
	Med-broken into >3 pieces, spalling/faulting <1/4"	4	5	6
	High-4 or more pieces, spalling/faulting >1/4"	7	8	9

Transverse Cracks

Extent (% slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-Cracks < 1/8"; no spalling/faulting	1	2	3
	Med-Cracks 1/8-1/2"; spall <3", fault >1/4"	4	5	6
	High-Cracks > 1/2"; spall >3", fault >1/4"	7	8	9

Joint Seal Damage

Extent (%joints)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low <10% joint length	1	2	3
	Med 10-50% joint length	4	5	6
	High >50% joint length	7	8	9

Faulting

Extent (Length)				
No Defects	Low <10%	Med 10-30%	High >30%	
Severity	Low < 1/2"	1	2	3
	Med 1/2-1"	4	5	6
	High > 1"	7	8	9

Patch Deterioration

Extent (Area)				
No Defects	Low <10%	Med 10-30%	High >30%	
Severity	Low-no fault, no settle at perimeter	1	2	3
	Med-fault & settle <1/4" at perimeter	4	5	6
	High-fault & settle >1/4" at perimeter, cracked patch	7	8	9

Corner Breaks

Extent (% of slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-corner cracks, no spalling or faulting	1	2	3
	Med-crack slightly spalled & faulted <1/4"	4	5	6
	High-crack highly spalled & faulted >1/4"	7	8	9

Longitudinal Cracks

Extent (% slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-Cracks < 1/8"; no spalling/faulting	1	2	3
	Med-Cracks 1/8-1/2"; spall <3", fault >1/2"	4	5	6
	High-Cracks > 1/2"; spall >3", fault >1/2"	7	8	9

Map Cracks

Extent (Area)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-small connected cracks, no spalling	1	2	3
	Med-connected cracks, no spalling	4	5	6
	High-large connected cracks with surface spalling	7	8	9

Deficiency Ratings With Associated Remaining Service Life

Asphalt Rating Sheet

Fatigue Cracking		Edge Cracking		Transverse Cracking		Utility Cuts	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20	0	20
1	10	1	12	1	14	1	14
2	8	2	10	2	12	2	12
3	6	3	8	3	10	3	10
4	8	4	10	4	12	4	12
5	6	5	8	5	10	5	10
6	4	6	6	6	8	6	8
7	6	7	8	7	10	7	10
8	2	8	6	8	6	8	6
9	0	9	4	9	2	9	2

Longitudinal Cracking		Block Cracking		Drainage/Roughness/Rutting	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20
1	14	1	12	1	16
2	12	2	10	2	10
3	10	3	8	3	4
4	12	4	10		
5	10	5	8		
6	8	6	6		
7	10	7	12		
8	8	8	6		
9	6	9	2		

Concrete Rating Sheet

Spalling		Broken Slabs		Transverse Cracks	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20
1	15	1	15	1	18
2	12	2	12	2	15
3	10	3	10	3	12
4	12	4	12	4	15
5	10	5	10	5	10
6	8	6	8	6	6
7	10	7	10	7	10
8	6	8	6	8	4
9	0	9	0	9	0

Joint Seal Damage		Faulting		Patch Deterioration	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	18
1	16	1	15	1	16
2	14	2	12	2	14
3	12	3	10	3	12
4	14	4	12	4	12
5	10	5	8	5	10
6	8	6	6	6	8
7	12	7	10	7	10
8	8	8	4	8	6
9	6	9	0	9	0

Corner Breaks		Longitudinal Cracks		Map Cracks	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	18	0	20	0	20
1	16	1	18	1	18
2	14	2	15	2	15
3	12	3	12	3	12
4	12	4	15	4	12
5	10	5	10	5	10
6	8	6	6	6	6
7	10	7	10	7	10
8	6	8	4	8	4
9	0	9	0	9	0

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE IN YEARS (Asphalt & Concrete Roads)

RSL	FAILED 0	POOR 1 - 6	FAIR 7 - 12	GOOD 13 - 18	EXCELLENT 19 - 20
-----	-------------	---------------	----------------	-----------------	----------------------

Deficiency Ratings With Associated Remaining Service Life

Native Primitive Improved Rating Sheet

Cross Section		Rutting		Roadside Drainage	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	7	1	9	1	8
2	5	2	7	2	4
3	0	3	5	3	0
		4	7		
		5	4		
		6	3		
		7	4		
		8	2		
		9	0		

Potholes		Dust		Corrugations	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	9	1	8	1	9
2	7	2	6	2	7
3	5	3	2	3	7
4	7			4	6
5	4			5	5
6	3			6	5
7	4			7	4
8	2			8	3
9	0			9	0

Gravel Rating Sheet

Cross Section		Rutting		Roadside Drainage	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	7	1	9	1	8
2	5	2	7	2	4
3	0	3	5	3	0
		4	7		
		5	4		
		6	3		
		7	4		
		8	2		
		9	0		

Potholes		Dust		Corrugations	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	9	1	8	1	9
2	7	2	6	2	7
3	5	3	2	3	7
4	7			4	6
5	4			5	5
6	3			6	5
7	4			7	4
8	2			8	3
9	0			9	0

Loose Aggregate	
Distress Rating	Remaining Service Life
0	10
1	9
2	8
3	7
4	8
5	7
6	6
7	5
8	3
9	0

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE IN YEARS (Gravel & Native Roads)

RSL	FAILED	POOR	FAIR	GOOD	EXCELLENT
	0	1 - 2	3 - 4	5 - 7	8 - 10